

PATENT

NEW APPLICATION TRANSMITTAL

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 addressed to **Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231** on October 23, 2000 under "EXPRESS MAIL" mailing label number **EL692672514US**.

Elizabeth A. VanAntwerp

Box Patent Application
Assistant Commissioner for
Patents
Washington D.C. 20231

Transmitted herewith for filing is the patent application of:

Inventor 1: Toshikazu HIROTA
Address: c/o NGK Insulators, Ltd.
2-56, Suda-Cho, Mizuho-Ku
Nagoya-City, Aichi-Prefecture 467-8530
Japan

Inventor 2: Takao OHNISHI
Address: c/o NGK Insulators, Ltd.
2-56, Suda-Cho, Mizuho-Ku
Nagoya-City, Aichi-Prefecture 467-8530
Japan

Inventor 3: Yukihiisa TAKEUCHI
Address: c/oNGK Insulators, Ltd.
2-56, Suda-Cho, Mizuho-Ku
Nagoya-City, Aichi-Prefecture 467-8530
Japan

Title: DISPENSER AND METHOD FOR PRODUCING DNA CHIP

1. Papers enclosed

A. Required for filing date under 37 CFR 1.53(b) (Regular) are:

43 Page(s) of Specification
11 Page(s) of Claims
1 Page(s) of Abstract
22 Sheets of Formal Drawings (Figs. 1-22)

B. Other Papers Enclosed

- [x] A Patent Application Bibliographic Data
- [x] A Preliminary Amendment
- [x] A combined Declaration and Power of Attorney
- [x] An Information Disclosure Statement
- [x] PTO Form-1449
- [x] An Assignment Transmittal and Assignment of the invention to NGK Insulators, Ltd.

2. Additional Papers to Follow Under Separate Cover

- ☒ A Claim for Priority and certified copies of 11-301627 and 2000-083020
filed October 22, 1999 and March 23, 2000, respectively in Japan

3. Small Entity Status

- ☐ A statement that this filing is by a small entity is attached.
☐ A separate refund request accompanies this paper.
☐ was filed on _____ (original).

4. The filing fee has been calculated as shown below:

- A. Filing Fee
☒ Original Patent Application \$ 710.00
(37 CFR 1.16(a) --\$710.00, Small Entity--\$355.00)
- B. Fees for Claims (**30** Claims; **8** Indep.)
☒ each independent claim in excess of 3
(37 CFR 1.16(b) --\$80.00, small entity--\$40.00) \$ 400.00
☒ each claim in excess of 20
(37 CFR 1.16(c) --\$18.00, small entity--\$9.00) \$ 180.00
☐ multiple dependent claim(s)
(37 CFR 1.16(d) --\$270.00 small entity--\$135.00) \$.00
- C. ☒ Assignment Fee \$ 40.00
- Total Fees Due \$ 1,330.00**

5. Payment of Fees and Authorization to Charge Additional Fees or Credit Overpayment

- ☒ A check in the amount of \$1,330.00 is enclosed.
☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-1446. A duplicate copy of this sheet is enclosed.
☒ Any additional filing fees required under 37 CFR 1.16.
☒ Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,

October 23, 2000

Date


 Stephen P. Burr

Reg. No. 32,970

SPB/eav

BURR & BROWN
 P.O. Box 7068
 Syracuse, NY 13261-7068

Customer No.: 025191
 Telephone: (315) 233-8300
 Facsimile: (315) 233-8320

INVENTOR INFORMATION

Inventor One Given Name:: Toshikazu
Family Name:: HIROTA
Postal Address Line One:: c/o NGK Insulators, Ltd.
Postal Address Line Two:: 2-56, Suda-Cho, Mizuho-Ku
City:: Nagoya-City
Country:: Japan
Postal or Zip Code:: 467-8530
City of Residence:: Owariasashi-City
Country of Residence:: Japan
Citizenship Country:: Japan
Inventor Two Given Name:: Takao
Family Name:: OHNISHI
Postal Address Line One:: c/o NGK Insulators, Ltd.
Postal Address Line Two:: 2-56, Suda-Cho, Mizuho-Ku
City:: Nagoya-City
Country:: Japan
Postal or Zip Code:: 467-8530
City of Residence:: Nishikasugai-Gun
Country of Residence:: Japan
Citizenship Country:: Japan
Inventor Three Given Name:: Yukihiha
Family Name:: TAKEUCHI
Postal Address Line One:: c/o NGK Insulators, Ltd.
Postal Address Line Two:: 2-56, Suda-Cho, Mizuho-Ku
City:: Nagoya-City
Country:: Japan
Postal or Zip Code:: 467-8530
City of Residence:: Nishikamo-Gun
Country of Residence:: Japan
Citizenship Country:: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 025191
Fax One:: (315) 233-8320
Electronic Mail One:: vananl@macklaw.com

APPLICATION INFORMATION

Title Line One:: DISPENSER AND METHOD FOR PRODUCING DNA C
Title Line Two:: HIP
Total Drawing Sheets:: 22
Formal Drawings?: Yes
Application Type:: Utility
Docket Number:: 789_060
Secrecy Order in Parent Appl.?: No

[illegible][illegible][illegible][illegible][illegible]


IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the application of: Toshikazu HIROTA, Takao OHNISHI and Yukihiisa TAKEUCHI

Filed: Concurrently Herewith

For: DISPENSER AND METHOD FOR PRODUCING DNA CHIP

Box Patent Application
Assistant Commissioner for Patents
Washington DC 20231

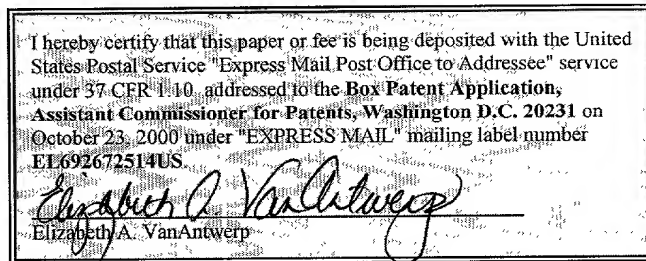

PRELIMINARY AMENDMENT

Sir:

Prior to examination, Applicants wish to amend the subject application as follows:

In the Specification:

Page 8, line 14, after "reliably.", please insert --The pin may be provided on the bottom of the pouring port so that the sample solution can be introduced into the pouring port even more reliably.--

REMARKS

Prior to examination, Applicants respectfully request entry of this Amendment in which the specification has been amended to correct minor informalities.

If the Examiner believes that contact with applicants' attorney would be advantageous toward the disposition of this case, he is herein requested to call applicants' attorney at the phone number noted below.

THE UNIVERSITY OF CHICAGO

Joseph Bm

Stephen P. Burr
Reg. No. 32,970

BURR & BROWN
P.O. Box 7068
Syracuse, NY 13261-7068

Customer No.: 025191
Telephone:(315) 233-8300
Facsimile:(315) 233-8320

DISPENSER AND METHOD FOR PRODUCING DNA CHIP

BACKGROUND OF THE INVENTION

Field of the Invention:

5 The present invention relates to a dispenser to be used for the production of a DNA chip (DNA microarray) in which several thousands to not less than ten thousands kinds of different types of DNA fragments are aligned and fixed as minute spots at a high density on a base plate such as a microscopic slide glass, and a method for producing a DNA chip by using the dispenser.

Description of the Related Art:

10 The method for analyzing the genetic structure has been remarkably progressed in recent years. A large number of genetic structures represented by those of human gene have been clarified. The analysis of the genetic structure as described above uses a DNA chip (DNA microarray) in which several thousands to not less than ten thousands kinds of different types of DNA fragments are aligned and fixed as spots on a base plate such as a microscopic slide glass.

15 Those widely used as a method for forming the spots for the production of the DNA chip are based on a system such as the QUILL system, the pin & ring system, and the spring pin system in which a sample solution containing DNA fragments is supplied (stamped) onto the base plate by using a so-called pin. Even when any one of the foregoing methods is adopted, it is necessary to suppress the dispersion of the

volume and the shape of each of the spots to be low so that the distance between the respective spots is maintained to be constant.

On the other hand, in order to realize a higher density, it is also greatly expected to develop a new method which is excellent in productivity and in which the shape control performance for the spot is satisfactory.

The QUILL system lies in a method in which a sample is stored in a recess formed at a pin tip, and the pin tip is allowed to make contact with the base plate so that the sample in the recess is transferred onto the base plate to form a minute spot. However, this system involves, for example, a problem of durability such that the pin tip is deformed or it is damaged by the contact with the base plate. Further, this system also involves, for example, a problem such that the sample stored in the recess is incompletely washed to facilitate the occurrence of cross-contamination.

The pin & ring system lies in a method in which a sample solution in a microplate is reserved with a ring, and then the sample in the ring is trapped by a pin tip so that the pin tip penetrates through the inside of the ring reserved with the solution to form a spot on the base plate. However, the sample, which can be reserved once, depends on the number of rings. Conventionally, the number of rings can not be increased. For this reason, in order to form several thousands to several tens thousands of sample minute

spots, it is also necessary to perform washing and drying steps several hundreds to several thousands times. Therefore, it is difficult to say that the productivity is necessarily high.

5 The spring pin system lies in a method in which a sample adhered to a pin tip is transferred onto the base plate by pressing the pin tip against the base plate. A double pin structure containing a spring is used to mitigate the damage of the pin and the base plate while the sample is ejected. However, basically, only one time of spotting can be performed with one time of reserve. This system is inferior in productivity.

10 In all of the conventional methods for forming the minute spots, the sample solution is transported onto the base plate in a state of being exposed to the atmospheric air. Therefore, an inconvenience arises such that the sample is dried during the transport, and it is impossible to perform the spotting. A problem arises such that the extremely expensive sample solution is used with bad efficiency.

15 On the other hand, a method is also investigated by using the so-called ink-jet system which is practically used for printers. However, many tasks arise concerning the size and the cost when several thousands to several tens
20 thousands of individual flow passages corresponding to every sample are formed. Further, in the case of the ink-jet system, it is necessary to previously charge the sample in a

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995

pump before the spotting so that no bubble is formed. For this reason, the sample is required in a large amount to effect the purge. Therefore, the efficiency of the use of the sample is extremely inferior. In general, in order to remove the bubble, it is preferable to move the liquid at a high speed in the flow passage including a pump chamber. As a result, the sample is agitated in the flow passage. When a delicate DNA solution is used as a sample, for example, DNA is damaged in some cases.

SUMMARY OF THE INVENTION

The present invention has been made taking the foregoing problems into consideration, an object of which is to provide a dispenser which comprises a large number of micropipettes arranged to makes it possible to form minute spots accurately at a high speed, which makes it possible to supply a solution to the respective micropipettes quickly and reliably, and which makes it possible to smoothly perform the steps from the supply of the solution to the supply onto a base plate.

Another object of the present invention is to provide a method for producing a DNA chip, which makes it possible to smoothly perform the steps from the supply of a solution to the supply onto a base plate and which makes it possible to improve the quality of the DNA chip and improve the yield.

According to the present invention, there is provided a dispenser comprising a plurality of arranged micropipettes

each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging the sample solution thereinto, and a discharge port for discharging the sample solution, formed on at least one or more substrates, the micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of the substrate which forms the cavity so that the sample solution is movable in the cavity, and the sample solution being discharged from the discharge port of each of the micropipettes; wherein a pin, which protrudes upwardly, is provided at the pouring port of each of the micropipettes.

According to another aspect of the present invention, there is provided a method for producing a DNA chip, comprising the steps of using a dispenser comprising a plurality of arranged micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging the sample solution thereinto, and a discharge port for discharging the sample solution, formed on at least one or more substrates, the micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of the substrate which forms the cavity so that the sample solution is movable in the cavity; and discharging the sample solution onto a base plate from the discharge port of each of the micropipettes to produce the DNA chip; wherein the dispenser to be used is provided with

a pin protruding upwardly at the pouring port of each of the micropipettes.

Accordingly, a hole can be bored with the pin through a solution storage section of a cartridge positioned over the pouring port so that the solution stored in the solution storage section may be introduced into the pouring port.

That is, a cartridge, which is arranged with a large number of solution storage sections, is positioned over the dispenser, and the cartridge is moved toward the dispenser. At this time, a hole is bored with the pin through each of the solution storage sections. Accordingly, the solution stored in the solution storage section is introduced into the pouring port along the pin. By doing so, it is unnecessary to use any special apparatus when the sample solution is poured into the dispenser from the solution storage section of the cartridge. Thus, no sample solution remains in the special apparatus, and the efficiency of the use of the sample solution is not lowered.

In this process, it is also preferable that when the solution stored in the solution storage section is introduced into the pouring port, a gas is fed under pressure downwardly to each of the solution storage sections. Accordingly, it is possible to shorten the period of time required to pour the solution.

In the present invention, the solution stored in the solution storage section can be introduced into the pouring port by boring a hole through a film member coated to close

the solution storage section of the cartridge positioned over the pouring port.

That is, a cartridge, which is arranged with a large number of solution storage sections, is coated with a film member to close the solution storage sections; the cartridge is positioned over the dispenser so that the film member is opposed to the dispenser; and the cartridge is moved toward the dispenser. During this process, a hole is bored with the pin through a portion of the film member corresponding to each of the solution storage sections. Accordingly, the solution stored in the solution storage section is introduced into the pouring port along the pin.

It is possible to carry out the process to bore the hole through the film member relatively conveniently, as compared with the process to bore the hole through the solution storage section of the cartridge. Therefore, it is easy to introduce the sample solution.

As described above, the dispenser according to the present invention can be used to supply the solution to the respective micropipettes quickly and reliably. It is possible to perform the steps from the supply of the solution to the supply onto the base plate.

The pin described above refers to a projection-shaped section having a portion protruding from the plane. It is preferable that the forward end is sharp. It is preferable that the arrangement position of each of the pouring ports of the micropipettes for constructing the dispenser is equal

to the arrangement position of each of the solution storage sections of the cartridge provided with the solution storage sections. Alternatively, it is preferable that the arrangement pitch is an integral multiple of the arrangement pitch of the solution storage sections, or an integral fraction thereof.

The pin may be provided at a position included in the pouring port as viewed in plan view, or it may be provided at a circumferential edge of the pouring port. When the pin is provided at the position included in the pouring port as viewed in plan view, the hole, through which the sample solution is introduced, can be positioned just over the pouring port. Thus, it is possible to introduce the sample solution more reliably. When the pin is provided at the circumference of the pouring port, then it is easy to form the pin, and the production cost of the dispenser is reduced.

In the present invention, it is also preferable that a holding section for holding a pipette for pouring the solution from the pouring port or a tube for receiving the pipette is provided at a circumferential edge of the pouring port of each of the micropipettes for constructing the dispenser.

Accordingly, when the solution is poured into each of the micropipettes of the dispenser by using the pipette, the pipette or the tube for receiving the pipette is held by the holding section. Therefore, it is possible to pour the

solution into the micropipette in a reliable manner. It is possible to effectively avoid, for example, any leakage of the solution.

Especially, at least the inner wall of the tube for receiving the pipette is subjected to a hydrophilic treatment. Thus, the solution, which is discharged from the pipette, can be reliably introduced into the pouring port of the micropipette without involving any bubble or the like.

In the present invention, it is also preferable that a scale for measuring an amount of liquid poured into the tube is formed at least at a part of the tube for receiving the pipette. It is also preferable that a portion provided with a projection and a portion provided with no projection are formed at positions of an identical distance from the pouring port on a part of an inner wall of the tube for receiving the pipette.

When the scale is formed, it is possible to measure and confirm the amount of the poured sample solution while pouring the sample solution, and the amount of the discharged sample solution while discharging the sample solution.

Thus, the scale is useful to manage the production of the product and manage the quality. Further, the scale is effective to manage the liquid amount of a substitution solution or an intermediate solution in the case of the use of a method in which the substitution solution or the intermediate solution is previously charged, when the sample solution is poured and charged into the micropipette. As a

result, it is possible to perform the substitution of the substitution solution certainly or the intermediate solution with the sample solution. Thus, it is possible to reduce the dispersion of the concentration of the sample solution to be supplied, and the quality of the product is improved.

When the portion provided with the projection and the portion provided with no projection are formed at the positions of the identical distance from the pouring port on the part of the inner wall of the tube for receiving the pipette, it is possible to perform the introducing operation while allowing the forward end of the pipette for introducing the sample solution to make contact with the projection. The injection position of the pipette can be always made to be constant, and the dispersion of the introducing operation is reduced.

The presence of the portion provided with the projection and the portion provided with no projection ensures the escape route for the gas during the pouring process. It is possible to perform the introducing operation without involving any bubble or the like. It is noted that such an effect is exhibited not only when the sample solution, the substitution solution or the like is introduced (poured). The foregoing arrangement is also effective when the pipetting is performed in order to remove an excessive amount of the sample solution, the substitution solution, or the intermediate solution.

In the present invention, it is preferable that a

filter, which is formed with a large number of openings having an opening area of not more than an opening area of the discharge port, is attached between the pouring port and the tube for receiving the pipette, in order to remove any foreign matter in the sample solution to be poured. By doing so, it is possible to previously avoid the invasion of the foreign matter into the micropipette, the clogging of the discharge port or the like, and the failure of the supply of the sample solution.

In the present invention, it is also preferable that the dispenser further comprises a pitch-varying mechanism for varying an arrangement pitch of each of the micropipettes for constructing the dispenser.

Accordingly, the solution can be supplied to the dispenser while allowing the arrangement pitch of the respective micropipettes of the dispenser to conform to an arrangement pitch of respective pipettes of a solution supply means for supplying the solution to the dispenser; and the sample solution can be supplied from the dispenser onto the base plate while setting the arrangement pitch of the respective micropipettes of the dispenser to be a pitch which is different from the arrangement pitch of the respective pipettes of the solution supply means. It is possible to perform the steps from the supply of the solution to the supply onto the base plate continuously.

That is, in general, the supply (pouring or introduction) of the sample solution to the micropipette and

the dispenser is often restricted by the size of the solution supply means or the cartridge having the solution storage section. It is inevitable to give a relatively large arrangement pitch for the respective pipettes or the pouring ports of the respective micropipette. On the other hand, when the sample solution is supplied onto the base plate, the small supply pitch is advantageous in many cases in view of the spot density and the number of spots capable of being supplied once. In such a situation, the dispenser according to the present invention is preferably adopted.

In the present invention, it is also preferable that a solution supply means, which is arranged with a large number of pipettes for supplying the solution to the dispenser and which has a pitch-varying mechanism for varying an arrangement pitch of the respective pipettes, is used; the solution is supplied to the solution supply means while allowing the arrangement pitch of the respective pipettes to conform to an arrangement pitch of solution storage sections of a cartridge; and the solution is supplied from the solution supply means to the dispenser while allowing the arrangement pitch of the respective pipettes to conform to an arrangement pitch of the micropipettes of the dispenser.

In this case, it is possible to smoothly perform the process for supplying, to the dispenser, the solution stored in the respective solution storage sections of the cartridge. It is possible to effectively shorten the period of time required for the production.

In the present invention, when the dispenser is used, it is also preferable to adopt the following procedure. That is, no pin is provided for the dispenser. A cartridge, which is arranged with a large number of solution storage sections, is positioned over the dispenser. A pin is externally used to bore a hole through each of the solution storage sections so that the solution stored in the solution storage section is introduced into the pouring port. In this case, a simple structure can be used for each of the micropipettes of the dispenser.

When the hydrophilic treatment is applied to the pouring port of the dispenser described above, the sample solution, which is supplied via the pouring port, can be smoothly introduced toward the cavity. Therefore, it is possible to shorten the period of time required to supply the sample solution.

The above and other objects, features, and advantages of the present invention will become more apparent from the following description when taken in conjunction with the accompanying drawings in which a preferred embodiment of the present invention is shown by way of illustrative example.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a perspective view depicting an arrangement of a dispenser according to a first embodiment together with a cartridge, in order to illustrate a first method for producing a DNA chip by using the dispenser;

FIG. 2 shows a plan view illustrating a micropipette which constitutes the dispenser according to the first embodiment;

FIG. 3 shows a sectional view taken along a line III-III shown in FIG. 2;

FIG. 4 shows a perspective view illustrating a shape of a flow passage including a cavity formed in a substrate of the micropipette;

FIG. 5 shows a perspective view illustrating another shape of flow passages including cavities formed in a substrate of the micropipette;

FIG. 6 shows a perspective view illustrating the DNA chip to be produced;

FIG. 7 shows a plan view illustrating an arrangement of a micropipette according to a first modified embodiment;

FIG. 8 shows a sectional view taken along a line VII-VII shown in FIG. 7;

FIG. 9 shows a sectional view illustrating an arrangement of a micropipette according to a second modified embodiment;

FIG. 10 illustrates a second method for producing a DNA chip by using the dispenser, depicting a state in which a film member is stuck to close respective storage sections of the cartridge;

FIG. 11 illustrates a state in which the cartridge stuck with the film member is transported to a position over the dispenser;

FIG. 12 shows a sectional view illustrating a state in which a hole is bored through the film member with the micropipette;

FIG. 13A shows a sectional view illustrating the process in which a sample solution is supplied onto a base plate, and a large number of minute spots are formed within one spot to be formed;

FIG. 13B shows a plan view thereof;

FIG. 14A shows a sectional view illustrating a state in which the large number of minute spots are combined to form one spot on the base plate;

FIG. 14B shows a plan view thereof;

FIG. 15 illustrates a third method for producing a DNA chip by using the dispenser;

FIG. 16A illustrates a state in which a sample solution is supplied from a solution supply apparatus to the dispenser according to the second embodiment;

FIG. 16B illustrates a state in which the sample solution is supplied from the dispenser according to the second embodiment onto a base plate;

FIG. 17A illustrates a state in which the sample solution is supplied from the respective storage sections of the cartridge to the solution supply apparatus;

FIG. 17B illustrates a state in which the sample solution is supplied from the solution supply apparatus to the dispenser;

FIG. 17C illustrates a state in which the sample

solution is supplied from the dispenser onto the base plate;

FIG. 18 shows a sectional view illustrating an arrangement of a micropipette of a dispenser according to a third embodiment;

5 FIG. 19 shows a perspective view illustrating an example of a holding section;

FIG. 20 shows a perspective view illustrating another example of the holding section;

FIG. 21 shows a sectional view illustrating an arrangement of another example of the micropipette of the dispenser according to the third embodiment; and

FIG. 22 shows a sectional view illustrating an arrangement of still another example of the micropipette of the dispenser according to the third embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Exemplary embodiments of the dispenser and the method for producing the DNA chip according to the present invention will be explained below with reference to FIGS. 1 to 22.

At first, as shown in FIG. 1, a dispenser 30A according to a first embodiment comprises a plurality of micropipettes 34 which are arranged in a matrix form on an upper surface of a rectangular fixation plate 32. The embodiment shown in FIG. 1 is illustrative of a case in which ten micropipettes 34 are arranged in five rows and two columns.

As shown in FIGS. 2 and 3, the micropipette 34

comprises a sample-pouring port 52 which is formed at the upper surface of a substrate 50 having a substantially rectangular parallelepiped-shaped configuration, a sample discharge port 54 which is formed at the lower surface of the substrate 50, a cavity 56 which is formed at the inside between the sample-pouring port 52 and the sample discharge port 54, and an actuator section 58 which is used to vibrate the substrate 50 (correctly a vibrating section 66 as described later on) or change the volume of the cavity 56.

Therefore, as shown in FIG. 3, through-holes 40 are provided through the fixation plate 32 at portions corresponding to the sample discharge ports 54 of the micropipettes 34 respectively. Accordingly, a sample solution, which is discharged from the sample discharge port 54 of the micropipette 34, is supplied (or dropped) through the through-hole 40, for example, to a base plate 20 which is fixed under the fixation plate 32.

An introducing bore 60 having a substantially L-shaped configuration with a large opening is formed over a region ranging from the sample-pouring port 52 to the inside of the substrate 50 in the micropipette 34. A first communication hole 62 having a small diameter is formed between the introducing bore 60 and the cavity 56. The sample solution, which is poured from the sample-pouring port 52, is introduced into the cavity 56 through the introducing bore 60 and the first communication hole 62.

A second communication hole 64, which communicates with

the sample discharge port 54 and which has a diameter larger than that of the first communication hole 62, is formed at a position different from that of the first communication hole 62, of the cavity 56. In the first embodiment, the first communication hole 62 is formed at the lower surface of the cavity 56. The position of the first communication hole 62 is deviated toward the sample-pouring port 52. The second communication hole 64 is formed at the position of the lower surface of the cavity 56 as well corresponding to the sample discharge port 54.

Further, in the first embodiment, the portion of the substrate 50, which is the upper surface of the cavity 56, is thin-walled to give a structure which tends to undergo the vibration with respect to the external stress so that the portion functions as a vibrating section 66. The actuator section 58 is formed on the upper surface of the vibrating section 66.

The substrate 50 is constructed by laminating a plurality of green sheets made of zirconia ceramics (first thin plate layer 50A, first spacer layer 50B, second thin plate layer 50C, second spacer layer 50D, and third thin plate layer 50E) followed by sintering into one unit.

That is, the substrate 50 is constructed by laminating the thin-walled first thin plate layer 50A which is formed with a window for constructing the sample-pouring port 52 and which constitutes a part of the vibrating section 66, the thick-walled first spacer layer 50B which is formed with

10
15
20
25
a part of the introducing bore 60 and a plurality of windows for constructing the cavity 56 respectively, the thin-walled second thin plate layer 50C which is formed with a part of the introducing bore 60 and a plurality of windows for constructing a part of the second communication hole 64 and the first communication hole 62 respectively, the thick-walled second spacer layer 50D which is formed with a plurality of windows for constructing a part of the introducing bore 60 and a part of the second communication hole 64 respectively, and the thin-walled third thin plate layer 50E which is formed with a window for constructing the sample discharge port 54, followed by sintering into one unit.

The actuator section 58 is constructed to have the vibrating section 66 described above as well as a lower electrode 70 which is directly formed on the vibrating section 66, a piezoelectric layer 72 which is composed of, for example, a piezoelectric/electrostrictive element or an anti-ferroelectrics formed on the lower electrode 70, and an upper electrode 74 which is formed on the upper surface of the piezoelectric layer 72.

As shown in FIG. 2, the lower electrode 70 and the upper electrode 74 are electrically connected to an unillustrated driving circuit via a plurality of pads 76, 78 which are formed on the upper surface of the substrate 50 respectively.

The micropipette 34 constructed as described above is

operated as follows. That is, when an electric field is generated between the upper electrode 74 and the lower electrode 70, then the piezoelectric layer 72 is deformed, and the vibrating section 66 is deformed in accordance therewith. Accordingly, the volume of the cavity (pressurizing chamber) 56 contacting with the vibrating section 66 is decreased or increased.

When the volume of the cavity 56 is decreased, the sample solution charged in the cavity 56 is discharged at a predetermined speed from the sample discharge port 54 which communicates with the cavity 56. As shown in FIG. 6, it is possible to prepare a DNA chip 20 in which the sample solutions discharged from the micropipettes 34 are aligned and fixed as minute spots 80 on a base plate 10 such as a microscopic slide glass. When the volume of the cavity 56 is increased, the sample solution is newly poured and charged from the communication hole 62 into the cavity 56 to make provision for the next discharge.

In this arrangement, the arrangement pitch of the sample discharge ports 54 in the dispenser 30A is larger than the arrangement pitch of the minute spots 80 formed on the base plate 10. Therefore, the sample solution is supplied while deviating the supply position for the dispenser 30A at every supplying time.

An apparatus structure based on the so-called ink-jet system (see Japanese Laid-Open Patent Publication No. 6-40030) may be adopted as the structure in which the volume

of the cavity 56 is decreased in accordance with the driving of the actuator section 58.

The cavity (pressurizing chamber) 56 is formed to have such a flow passage dimension that the sample solution containing DNA fragments or the like is moved without any turbulence.

That is, the dimension of the cavity 56 differs depending on the type of the sample, the size of liquid droplets to be prepared, and the density of spotting formation. However, for example, when DNA fragments which length is about 1 to 10,000 base pairs are dissolved in a \times 1 TE buffer solution at a concentration of not more than 100 $\mu\text{g}/\mu\text{l}$, and a sample, which is obtained by mixing with an aqueous solution containing an equivalent amount of polymer, is dripped at a pitch of 50 to 600 μm to give a liquid droplet diameter of 30 to 500 $\mu\text{m}\phi$, then it is preferable that the cavity length (L) is 1 to 5 mm, the cavity width (W) is 0.1 to 1 mm, and the cavity depth (D) is 0.1 to 0.5 mm as shown in FIG. 4. It is preferable that the inner wall of the cavity 56 is smooth without involving any projection to disturb the flow. It is more preferable that the material of the cavity 56 is made of ceramics which has good affinity with respect to the sample solution.

When the shape as described above is adopted, the cavity 56 can be used as a part of the flow passage ranging from the sample-pouring port 52 to the sample discharge port 54. The sample can be introduced to the sample discharge

port 54 without disturbing the flow of the sample solution which is moved from the sample-pouring port 52 via the introducing bore 60 and the first communication hole 62 to the inside of the cavity 56.

5 The substrate 50 is the sintered product obtained by laminating the zirconia ceramics into one unit as described above. Alternatively, the substrate 50 may be a bonded product composed of a sintered matter of zirconia ceramics formed with the actuator section 58, and a metal or resin film or the like. Especially, the thin plate layer 50E, in which the sample discharge port 54 is formed, is preferably a sheet obtained by processing an organic resin such as a PET film by means of an excimer laser or the like, or a sheet obtained by punching a metal such as a stainless steel film with a punch and die or the like, considering the matching with the processing method therefor.

10 The sizes of the sample discharge port 54 and the first communication hole 62 are optimally designed depending on, for example, the physical property, the discharge amount, and the discharge speed of the sample solution to be discharged. However, they are preferably about 10 to 100 $\mu\text{m}\phi$.

15 In FIG. 5, two of the first communication holes 62 communicate with one sample-pouring port 52 and the introducing bore 60 connected thereto. Two flow passages 20 65, in each of which the cavity 56, the second communication hole 64, and the sample discharge port 54 are continuously

formed, are independently formed for the first communication holes 62 respectively. Actuator sections 58 (not shown), which are wired and driven independently respectively, are formed on the upper surfaces of the respective cavities 56. When the micropipette 34 constructed as described above is used, it is possible to supply an identical sample solution onto the base plate 10 simultaneously or at any deviated timing.

As shown in FIG. 1, a plurality of pins 38 for positioning and fixing the micropipettes 34 are provided on the upper surface of the fixation plate 32. When the micropipette 34 is fixed on the fixation plate 32, the micropipette 34 is placed on the fixation plate 32 while inserting the pins 38 of the fixation plate 32 into positioning holes 90 (see FIG. 2) provided at the both sides of the substrate 50 of the micropipette 34. Thus, a plurality of micropipettes 34 are automatically positioned with a predetermined array arrangement.

In the first embodiment, as shown in FIGS. 2 and 3, a pin 100 is provided to protrude upwardly from the sample-pouring port 52. The embodiment shown in FIGS. 2 and 3 is illustrative of the arrangement wherein protruding sections 50Aa, 50Ba, 50Ca, 50Da, which protrude, for example, toward the center of the sample-pouring port 52, are integrally provided for the four layers 50A to 50D except for the lowermost layer of the third thin plate layer 50E, of the respective layers 50A to 50E for constructing the substrate

50. The pin 100 is secured, for example, with an adhesive to the upper surface of the protruding section 50Aa of the upper layer (first thin plate layer 50A).

Other arrangements are available, including, for example, an arrangement in which the pin 100 is bonded to the bottom of the introducing bore 60 communicating with the sample-pouring port 52 (first modified embodiment), for example, as shown in FIGS. 7 and 8, and an arrangement in which the circumferential edge 52a of the sample-pouring port 52 is chamfered, and the pin 100 is bonded to a part of the circumferential edge 52a (second modified embodiment) as shown in FIG. 9. The pin 100 may be formed, for example, by the aid of the adhesive. Alternatively, the pin 100 may be formed by means of integrated sintering of zirconia ceramics.

The dispenser 30A is constructed such that the plurality of micropipettes 34 each having the sample-pouring port 52 and the sample discharge port 54 are provided in an upstanding manner with the respective sample discharge ports 54 directed downwardly.

That is, the respective micropipettes 34 are arranged such that the respective sample-pouring ports 52 are disposed on the upper side, the sample discharge ports 54 are disposed on the lower side, and the respective sample discharge ports 54 are aligned two-dimensionally. Sample solutions of mutually different types are discharged from the sample discharge ports 54 respectively.

When the dispenser 30A constructed as described above is used, several methods are available to supply the sample solutions of mutually different types corresponding to the respective sample-pouring ports 52. That is, as shown in FIG. 1, for example, a method is available which is based on the use of a cartridge 112 arranged with a large number of recesses (storage sections) 110 each having a substantially V-shaped cross section.

Specifically, explanation will be made with reference to FIGS. 1, 3, 8, 9, and 10 to 12 for several methods for pouring the sample solution to the respective micropipettes 34 of the dispenser 30A by using the cartridge 112.

In the first method, at first, mutually different types of sample solutions are charged in the respective storage sections 110 of the cartridge 112. After that, as shown in FIG. 1, the cartridge 112 is positioned over the dispenser 30A with the forward ends (apexes) of the storage sections 110 directed downwardly.

Subsequently, the cartridge 112 is moved toward the dispenser 30A. As shown in FIGS. 3, 8, and 9, the apex of the storage section 110 contacts with the pin 100 provided on each of the micropipettes 34 at the stage at which the spacing distance between the cartridge 112 and the dispenser 30A is a predetermined distance. When the cartridge 112 is further moved downwardly, the apex of the storage section 110 is pierced by the pin 100. As a result, a hole is bored through each of the storage sections 110.

When the cartridge 112 is slightly moved upwardly at the stage at which the hole is bored through the storage section 110, the sample solution leaks from the gap between the hole and the pin 100. The leaked sample solution is transmitted through the pin 100, and it is introduced into the sample-pouring port 52. The sample solution passes through the introducing bore 60 and the first communication hole 62, and it is introduced into the cavity 56.

In the first method, it is preferable that the gas is fed under pressure from the position over the cartridge toward the cartridge 112 at least when the hole is bored through the apex of the storage section 110. Accordingly, it is possible to shorten the period of time required to perform the pouring process.

Next, in the second method, at first, mutually different types of sample solutions are charged in the respective storage sections 110 of the cartridge 112. After that, as shown in FIG. 10, a thin film member 130 is stuck to close the respective storage sections 110 of the cartridge 112. Subsequently, as shown in FIG. 11, the cartridge 112 is positioned over the dispenser 30A with the forward ends (apexes) of the storage sections 110 directed upwardly. That is, the film member 130 is opposed to the dispenser 30A.

Subsequently, the cartridge 112 is moved toward the dispenser 30A. As shown in FIG. 12, the film member 130 contacts with the pin 100 provided on each of the

micropipettes 34 at the stage at which the spacing distance between the cartridge 112 and the dispenser 30A is a predetermined distance. When the cartridge 112 is further moved downwardly, the film member 130 is pierced by the pin 100. As a result, holes are bored through portions of the film member 130 corresponding to the respective storage sections 110.

When the cartridge 112 is slightly moved upwardly at the stage at which the holes are bored through the film member 130, the sample solution leaks from the gap between the hole and the pin 100. The leaked sample solution is transmitted through the pin 100, and it is introduced into the sample-pouring port 52. The sample solution passes through the introducing bore 60 and the first communication hole 62, and it is introduced into the cavity 56.

In the second method, it is preferable that the cartridge 112 is heated at least when the hole is bored through the storage section 110. Accordingly, the sample solution and the gas in each of the storage sections 110 are expanded. Therefore, the sample solution is quickly introduced into the sample-pouring port 52 through the hole bored through the film member 130. As a result, it is possible to shorten the period of time required to perform the pouring process.

As described above, according to the dispenser 30A concerning the first embodiment and the foregoing first and second methods, it is possible to supply the sample solution

to each of the micropipettes 34 quickly, efficiently, and reliably. It is possible to perform the steps from the supply of the sample solution to the supply onto the base plate 10. It is possible to improve the quality of the DNA chip 20 and improve the yield.

The first and second methods described above are illustrative of the case of the application to the dispenser 30A having the micropipette 34 in which the pin 100 is secured to the protruding section 50Aa provided for the sample-pouring port 52 as shown in FIGS. 3 and 12. Alternatively, the foregoing procedures are also applicable in an equivalent manner to the dispenser 30A having the micropipette 34 in which the pin 100 is provided on the bottom of the introducing bore 60 as shown in FIG. 8, and the dispenser 30A having the micropipette 34 in which the pin 100 is provided at the circumferential edge 52a of the sample-pouring port 52.

In the first and second methods, it is also preferable to provide a mechanism for washing the space ranging from the sample-pouring port 52 to the sample discharge port 54 formed in the substrate 50 of each of the micropipettes 34. In this arrangement, for example, several thousands to several tens thousands types or many kinds of DNA fragments are discharged as the minute spots 80 with good purity without involving any contamination, which is preferred.

As described above, the substrate 50 for constructing the micropipette 34 is formed of ceramics, for which it is

possible to use, for example, fully stabilized zirconia, partially stabilized zirconia, alumina, magnesia, and silicon nitride.

Among them, the fully stabilized/partially stabilized zirconia is used most preferably, because the mechanical strength is large even in the case of the thin plate, the toughness is high, and the reactivity with the piezoelectric layer 72 and the electrode material is small.

When the fully stabilized/partially stabilized zirconia is used as the material, for example, for the substrate 50, it is preferable that the portion (vibrating section 66), on which the actuator section 58 is formed, contains an additive such as alumina and titania.

Those usable as the piezoelectric ceramic for the piezoelectric layer 72 for constructing the actuator section 58 include, for example, lead zirconate, lead titanate, lead magnesium niobate, lead magnesium tantalate, lead nickel niobate, lead zinc niobate, lead manganese niobate, lead antimony stannate, lead manganese tungstate, lead cobalt niobate, and barium titanate, and composite ceramics containing components obtained by combining any of them. However, in the first embodiment, a material containing a major component composed of lead zirconate, lead titanate, and lead magnesium niobate is preferably used, because of the following reason.

That is, such a material has a high electromechanical coupling constant and a high piezoelectric constant.

Additionally, such a material has small reactivity with the substrate material during the sintering of the piezoelectric layer 72, making it possible to stably form the product having a predetermined composition.

5 Further, in the first embodiment, it is also preferable to use ceramics obtained by appropriately adding, to the piezoelectric ceramics described above, for example, oxides of lanthanum, calcium, strontium, molybdenum, tungsten, barium, niobium, zinc, nickel, manganese, cerium, cadmium, chromium, cobalt, antimony, iron, yttrium, tantalum, lithium, bismuth, and stannum, or a combination of any of them, or other compounds.

For example, it is also preferable to use ceramics containing a major component composed of lead zirconate, lead titanate, and lead magnesium niobate, and further containing lanthanum and strontium.

On the other hand, it is preferable that the upper electrode 74 and the lower electrode 70 of the actuator section 58 are made of metal which is solid at room temperature and which is conductive. For example, it is possible to use metal simple substance of, for example, aluminum, titanium, chromium, iron, cobalt, nickel, copper, zinc, niobium, molybdenum, ruthenium, palladium, rhodium, silver, stannum, tantalum, tungsten, iridium, platinum, gold, and lead, or alloy obtained by combining any of them. It is also preferable to use a cermet material obtained by dispersing, in the metal described above, the same material

as that of the piezoelectric layer 72 or the substrate 50.

The respective actuator sections 58 are driven after the mutually different types of sample solutions are charged to the respective micropipettes 34 in accordance with the first method or the second method described above so that the sample solutions are discharged from the sample discharge ports 54 of the respective micropipettes 34.

As for the electrical signal to be applied to each of the electrodes 70, 74 of the actuator section 58, when the actuator section 58 performs the ON operation to decrease the volume of the cavity 58, the pulse-shaped voltage is applied to each of the electrodes 70, 74. In this procedure, for example, the displacement amount and the displacement speed of the vibrating section 66 are changed by changing, for example, the amplitude (voltage) of the pulse, the amount of change per unit time (rising angle of the voltage waveform), and the pulse width. Accordingly, it is possible to control the discharge amount of the sample solution. The number of dripping operations for the sample solution per unit time can be altered by changing the number of pulses to be generated during a certain period.

When one spot 80 is formed by supply a plurality of drops of the sample solution, the number of supply times is usually increased while fixing the supply position. However, the supply position may be deviated every time when the supply is performed. For example, as shown in FIGS. 13A and 13B, minute spots 80a based on a plurality of drops of

the sample solution are formed within one spot 80 (indicated by a two-dot chain line) to be formed, by appropriately changing the supply position of the sample solution. The minute spots 80a are combined (integrated) on the base plate 10. Accordingly, as shown in FIGS. 14A and 14B, one spot 80 is formed. In this process, it is possible to obtain a uniform diameter of the respective spots 80 formed on the base plate 10, by controlling the number of supply times, the supply position, and the supply amount for one time of operation, depending on the type of the sample solution to be supplied.

It is preferable that a voltage of such a degree to excite the vibration is applied to the actuator section 58 after the sample solution is charged into the cavity 56. Accordingly, the DNA fragments contained in the sample solution charged in the cavity are fully dispersed, and thus no dispersion occurs in the amount of the DNA fragments for every supply operation.

In the embodiments described above, the pins 100 are provided for the respective micropipettes 34 of the dispenser 30A. Alternatively, as shown in FIG. 15, a pin 100 may be externally used to bore a hole through each of the storage sections 110 of the cartridge 112 (third method) without providing the pin 100 for each of the micropipettes 34.

That is, as shown in FIG. 15, the dispenser 30A to be used is provided with no pin 100 at the sample-pouring port

52 of each of the micropipettes 34. As shown by two-dot chain lines, the storage section 110 is pierced by the pin 100 from the position over each of the storage sections 110, for example, at the stage at which each of the storage sections 110 of the cartridge 112 contacts with the sample-pouring port 52 of the micropipette 34 or the former is disposed closely to the latter to bore a hole through the storage section 110.

When the pin 100 is pulled out at the stage at which the hole is bored through the storage section 110, then the sample solution is discharged from the hole, and it is introduced into the sample-pouring port 52. The sample solution passes through the introducing bore 60 and the first communication hole 62, and it is introduced into the cavity 56.

The dispenser 30A according to the first embodiment described above is illustrative of the case in which the arrangement pitch of the respective micropipettes 34 is approximately the same as the arrangement pitch of the respective storage sections 110 of the cartridge 112. Alternatively, as in a dispenser 30B according to a second embodiment shown in FIGS. 16A and 16B, it is also preferable that the arrangement pitch of the respective micropipettes 34 is variable.

That is, as shown in FIGS. 16A and 16B, the dispenser 30B according to the second embodiment is provided with a pitch-varying mechanism 140 for varying the arrangement

pitch of the respective micropipettes 34. Those adoptable
as the pitch-varying mechanism 140 include, for example, a
mechanism based on a screw, a mechanism based on a spring,
and a mechanism based on a combination of the foregoing
mechanisms.

Especially, when the dispenser 30B according to the
second embodiment is used, as shown in FIG. 16A, it is
possible to use a solution supply apparatus 144 comprising a
large number of arranged pipettes 142.

The variation of the arrangement pitch of the
respective micropipettes 34 is set as follows. That is, for
example, when the arrangement pitch of the respective
micropipettes 34 is minimum with the pitch-varying mechanism
140, as shown in FIG. 16B, the pitch is optimum for the
supply onto the base plate 10. For example, when the
arrangement pitch is maximum, as shown in FIG. 16A, the
arrangement pitch is approximately the same as the
arrangement pitch of the respective pipettes 142 of the
solution supply apparatus 144. The foregoing setting is
preferably adopted because it is possible to suppress the
dispersion concerning the pitch between the respective
micropipettes 34.

When the dispenser 30B is used, at first, as shown in
FIG. 16A, the arrangement pitch of the respective
micropipettes 34 is maximized by using the pitch-varying
mechanism 140 to give approximately the same arrangement
pitch as the arrangement pitch of the respective pipettes

142 of the solution supply apparatus 144. In this state, the sample solution is supplied from the solution supply apparatus 144 to the respective micropipettes 34 of the dispenser 30B.

5 At the stage at which the supply of the sample solution to the dispenser 30B is completed, as shown in FIG. 16B, the pitch-varying mechanism 140 is used to minimize the arrangement pitch of the respective micropipettes 34. Subsequently, the dispenser 30B is transported to the position over the base plate 10, and then the actuator sections 58 of the respective micropipettes 34 are driven. The sample solution is discharged and supplied onto the base plate 10 to form the minute spots 80 on the base plate 10.

10 Concerning the dispenser 30B according to the second embodiment and the production method based on the use of the dispenser 30B, it is possible to perform the supply of the sample solution from the solution supply apparatus 144 to the dispenser 30B and the supply of the sample solution from the dispenser 30B onto the base plate 10 quickly, efficiently, and reliably. It is possible to smoothly perform the steps from the supply of the sample solution to the supply onto the base plate 10. It is possible to improve the quality of the DNA chip 20 and improve the yield.

20 In the second embodiment described above, the pitch-varying mechanism 140 is provided for the dispenser 30B. Alternatively, as shown in FIGS. 17A and 17B, a pitch-

varying mechanism 150 may be provided for the solution supply apparatus 144. The pitch-varying mechanism 150 has a mechanism for varying the arrangement pitch of the respective pipettes 142 for constructing the solution supply apparatus 144. Those adoptable as the pitch-varying mechanism 150 include, for example, a mechanism based on a screw, a mechanism based on a spring, and a mechanism based on a combination of the foregoing mechanisms.

In this case, as shown in FIG. 17B, it is possible to use a dispenser 30 in which the arrangement pitch of the respective micropipettes is fixed to be a pitch optimum to supply the sample solution onto the base plate 10.

The variation of the arrangement pitch of the respective pipettes 142 of the solution supply apparatus 144 is set as follows. That is, for example, when the arrangement pitch of the respective pipettes 142 is minimum with the pitch-varying mechanism 150, as shown in FIG. 17B, the pitch is the arrangement pitch of the sample-pouring ports 52 of the respective micropipettes 34 of the dispenser 30. For example, when the arrangement pitch of the respective pipettes 142 is maximum, as shown in FIG. 17A, the arrangement pitch is approximately the same as the arrangement pitch of the respective storage sections 110 of the cartridge 112. The foregoing setting is preferably adopted because it is possible to suppress the dispersion concerning the pitch between the respective pipettes 142 of the solution supply apparatus 144.

When the solution supply apparatus 144 is used, at first, as shown in FIG. 17A, the arrangement pitch of the respective pipettes 142 is maximized by using the pitch-varying mechanism 150 to give approximately the same pitch as the arrangement pitch of the respective storage sections 110 of the cartridge 112. In this state, the sample solution, which is stored in the storage section 110 of the cartridge 112, is sucked and introduced into the solution supply apparatus 144 by the aid of each of the pipettes 142.

At the stage at which the supply of the sample solution to the solution supply apparatus 144 is completed, as shown in FIG. 17B, the arrangement pitch of the respective pipettes 142 is minimized by using the pitch-varying mechanism 150 to give approximately the same pitch as the arrangement pitch of the respective micropipettes 34 of the dispenser 30. In this state, the sample solution is supplied from the solution supply apparatus 144 to each of the micropipettes 34 of the dispenser 30.

At the stage at which the supply of the sample solution to the dispenser 30 is completed, as shown in FIG. 17C, the dispenser 30 is transported to the position over the base plate 10. After that, the actuator sections 58 of the respective micropipettes 34 are driven to discharge and supply the sample solution onto the base plate 10. Thus, the minute spots 80 are formed on the base plate 10.

As described above, in the production method based on the use of the solution supply apparatus 144 having the

pitch-varying mechanism 150, it is possible to perform the supply of the sample solution from the cartridge 112 to the solution supply apparatus 144, the supply of the sample solution from the solution supply apparatus 144 to the dispenser 30, and the supply of the sample solution from the dispenser 30 onto the base plate 10 quickly, efficiently, and reliably. It is possible to smoothly perform the steps from the supply of the sample solution to the supply onto the base plate 10. It is possible to improve the quality of the DNA chip 20 and improve the yield.

Next, a dispenser 30C according to a third embodiment will be explained with reference to FIGS. 18 to 22.

As shown in FIG. 18, the dispenser 30C according to the third embodiment is especially applicable to the dispenser 30B according to the second embodiment and the dispenser 30 shown in FIG. 17B. The dispenser 30C comprises a holding section 160 for holding each of the pipettes 142 of the solution supply apparatus 144, the holding section 160 being formed at a circumferential edge of the sample-pouring port 52 of each of the micropipettes 34. The holding section 160 includes, for example, an O-ring which is provided at the circumferential edge of the sample-pouring port 52, and a fixation section 164 for fixing the O-ring 162.

As shown in FIG. 19, for example, the fixation section 164 is integrally formed with a side wall 166 which is formed to have a ring-shaped configuration, and an upper wall 170 which is formed with a circular hole 168 for

preventing upward disengagement of the O-ring 162. The fixation section 164 may be formed integrally with the substrate 50. Alternatively, the fixation section 164 may be formed as a member separate from the substrate 50, and it may be secured onto the substrate 50, for example, by the aid of an adhesive. FIG. 18 is illustrative of the case in which the fixation section 164 is secured with an adhesive.

Another example of the fixation section 164 is shown, for example, in FIG. 20. That is, the fixation section 164 is constructed by providing a plurality of (four in the example shown in FIG. 20) L-shaped holding tabs 172 with their upper portions bent toward the axis m of the sample-pouring port 52.

When the sample solution is used for each of the micropipettes 34 of the dispenser 30C according to the third embodiment by using the solution supply apparatus 144, as shown in FIG. 18, the forward end of each of the pipettes 142 of the solution supply apparatus 144 is inserted into the O-ring 162 of the holding section 160 of each of the corresponding micropipettes 34.

Another example of the supply of the sample solution is shown, for example, in FIG. 21. In this case, a tube 180, into which each of the pipettes 142 of the solution supply apparatus 144 is insertable, is held by the holding section 160 to supply the sample solution to the micropipette 34. It is possible to use the tube 180 in which the diameter is set to be gradually increased upwardly, and the diameter of

the lower end is set to be approximately the same as the inner diameter of the O-ring 162.

When the tube 180 as described above is used, the operation is preferably performed while allowing the forward end of the pipette 142 to approach the inner wall of the tube 180, because of the following reason. That is, when the operation is performed as described above, no inconvenience arises, which would be otherwise caused, for example, such that the sample solution discharged from the pipette 142 collides with the inner wall of the tube 180, and it is scattered.

In the case of the dispenser 30C according to the third embodiment, when the sample solution is poured into each of the micropipettes 34 of the dispenser 30C by using the pipette 142, the pipette 142 or the tube 180 is held by the holding section 160. Therefore, the sample solution can be reliably poured into the micropipette 34. It is possible to effectively avoid any solution leakage or the like.

Especially, when at least the inner wall of the tube 180 is subjected to a hydrophilic treatment, the sample solution discharged from the pipette 142 can be reliably introduced into the sample-pouring port 52 of the micropipette 34, which is preferred.

Still another example of the supply of the sample solution is shown, for example, in FIG. 22. That is, a scale 182 for measuring the amount of liquid poured into the tube 180 is formed at a part of the tube 180 for receiving

each of the pipettes 142 of the solution supply apparatus 144. Further, a portion provided with a projection 184 for making contact with a part of each of the pipettes 142, and a portion provided with no projection 184 may be formed at positions of an identical distance from the sample-pouring port 52 on a part of the inner wall of the tube 180.

In FIG. 22, a filter 186, which is formed with a large number of openings having an opening area of not more than an opening area of the sample discharge port 54, is attached between the tube 180 and the sample-pouring port 52 by holding the circumference with the holding section 160, the substrate 50, and an adhesive 188, in order to remove any foreign matter in the sample solution to be poured.

In this arrangement, the holding section 160 is composed of an elastic member such as a rubber as a whole. The tube 180 is held in an air-tight manner by only the holding section. The amount of the poured sample solution can be confirmed while pouring the sample solution by the aid of the scale 182. When the pouring is performed while allowing the projection 184 to make contact with each of the pipettes 142, then the pouring position is always constant, and it is possible to reduce the dispersion of the pouring operation. Further, the portion, at which the projection 184 is not formed, constitutes a path for allowing the gas to escape during the pouring. Therefore, the pouring operation can be performed in a reliable manner without involving any bubble in the sample solution.

Further, the filter 186 can be used to shut off any contamination of foreign matter into the micropipette 34 and avoid any discharge failure which would be otherwise caused by clogging of foreign matter. It is preferable that the size (diameter) of the opening portion of the filter 186 is not more than the size (diameter) of the discharge port. However, if the opening is too small, it is difficult to pour the sample solution. Therefore, it is more preferable that the size (diameter) of the opening portion of the filter 186 is about 70 % of the opening diameter of the discharge port.

As described above, when the DNA chip 20 is produced by using any one of the dispensers 30A to 30C according to the first to third embodiments and the solution supply apparatus 144 shown in FIG. 17A, it is possible to smoothly perform the steps from the supply of the sample solution to the supply onto the base plate 10. It is possible to improve the quality of the DNA chip 20 and improve the yield.

Especially, when each of the sample-pouring ports 52 is subjected to the hydrophilic treatment for the dispensers 30A to 30C according to the first to third embodiments and the dispenser 30 shown in FIG. 17B, the sample solution, which is supplied via the sample-pouring port 52, can be smoothly introduced toward the cavity 56. Therefore, it is possible to shorten the period of time required to supply the sample solution.

It is a matter of course that the dispenser and the

method for producing the DNA chip according to the present invention are not limited to the embodiments described above, which may be embodied in other various forms without deviating from the gist or the essential characteristics of the present invention.

5

What is claimed is:

1. A dispenser comprising a plurality of arranged micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging said sample solution thereinto, and a discharge port for discharging said sample solution, formed on at least one or more substrates, said micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of said substrate which forms said cavity so that said sample solution is movable in said cavity, and said sample solution being discharged from said discharge port of each of said micropipettes, wherein:

a pin, which protrudes upwardly, is provided at said pouring port of each of said micropipettes.

2. The dispenser according to claim 1, wherein said pin is provided at a position included in said pouring port as viewed in plan view.

3. The dispenser according to claim 1, wherein said pin is provided at a circumferential edge of said pouring port.

4. The dispenser according to claim 1, wherein said pin is used in order to bore a hole through a solution storage section of a cartridge positioned over said pouring

port so that said solution stored in said solution storage section is introduced into said pouring port.

5 5. The dispenser according to claim 1, wherein said pin is used in order to bore a hole through a film member coated to close a solution storage section of a cartridge positioned over said pouring port so that said solution stored in said solution storage section is introduced into said pouring port.

10 6. The dispenser according to claim 1, wherein said pouring port is subjected to a hydrophilic treatment.

15 7. A dispenser comprising a plurality of arranged micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging said sample solution therein, and a discharge port for discharging said sample solution, formed on at least one or more substrates, said micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of said substrate which forms said cavity so that said sample solution is movable in said cavity, and said sample solution being discharged from said discharge port of each of said micropipettes, wherein:

20 a holding section for holding a pipette for pouring said solution from said pouring port or a tube for receiving said pipette is provided at a circumferential edge of said

pouring port of each of said micropipettes.

8. The dispenser according to claim 7, wherein at least an inner wall of said tube for receiving said pipette is subjected to a hydrophilic treatment.

9. The dispenser according to claim 7, wherein a scale for measuring an amount of liquid poured into said tube is formed at least at a part of said tube for receiving said pipette.

10. The dispenser according to claim 7, wherein a portion provided with a projection and a portion provided with no projection are formed at positions of an identical distance from said pouring port on a part of an inner wall of said tube for receiving said pipette.

11. The dispenser according to claim 7, wherein a filter, which is formed with a large number of openings having an opening area of not more than an opening area of said discharge port, is attached between said pouring port and said tube for receiving said pipette.

12. The dispenser according to claim 7, wherein said pouring port is subjected to a hydrophilic treatment.

13. A dispenser comprising a plurality of arranged

micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging said sample solution thereinto, and a discharge port for discharging said sample solution, formed on at least one or more substrates, said micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of said substrate which forms said cavity so that said sample solution is movable in said cavity, and said sample solution being discharged from said discharge port of each of said micropipettes, wherein:

said dispenser further comprises a pitch-varying mechanism for varying an arrangement pitch of each of said micropipettes.

14. The dispenser according to claim 13, wherein said pouring port is subjected to a hydrophilic treatment.

15. A method for producing a DNA chip, comprising the steps of using a dispenser comprising a plurality of arranged micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging said sample solution thereinto, and a discharge port for discharging said sample solution, formed on at least one or more substrates, said micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of said substrate which forms said cavity so that said sample solution is

movable in said cavity; and discharging said sample solution onto a base plate from said discharge port of each of said micropipettes to produce said DNA chip, wherein:

5 a cartridge, which has a large number of arranged solution storage sections, is positioned over said dispenser, and a hole is bored through each of said solution storage sections with a pin so that said solution stored in said solution storage section is introduced into said pouring port.

10 16. The method for producing said DNA chip according to claim 15, wherein said sample solution is supplied onto said base plate in accordance with an ink-jet system.

15 17. A method for producing a DNA chip, comprising the steps of using a dispenser comprising a plurality of arranged micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging said sample solution therein, and a discharge port for discharging said sample solution, formed on at least one or more substrates, said micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of said substrate which forms said cavity so that said sample solution is
20 movable in said cavity; and discharging said sample solution onto a base plate from said discharge port of each of said micropipettes to produce said DNA chip, wherein:
25

said dispenser to be used is provided with a pin protruding upwardly at said pouring port of each of said micropipettes.

5 18. The method for producing said DNA chip according to claim 17, wherein:

 a cartridge, which is arranged with a large number of solution storage sections, is positioned over said dispenser; and

 said cartridge is moved toward said dispenser, and a hole is bored with said pin through each of said solution storage sections so that said solution stored in said solution storage section is introduced into said pouring port.

10
15
20 19. The method for producing said DNA chip according to claim 18, wherein when said solution stored in said solution storage section is introduced into said pouring port, a gas is fed under pressure downwardly to each of said solution storage sections.

 20. The method for producing said DNA chip according to claim 17, wherein:

25 a cartridge, which is arranged with a large number of solution storage sections, is coated with a film member to close said solution storage sections;

 said cartridge is positioned over said dispenser so

that said film member is opposed to said dispenser; and

said cartridge is moved toward said dispenser to bore a hole with said pin through a portion of said film member corresponding to each of said solution storage sections so that said solution stored in said solution storage section is introduced into said pouring port.

21. The method for producing said DNA chip according to claim 17, wherein said sample solution is supplied onto said base plate in accordance with an ink-jet system.

22. A method for producing a DNA chip, comprising the steps of using a dispenser comprising a plurality of arranged micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging said sample solution thereinto, and a discharge port for discharging said sample solution, formed on at least one or more substrates, said micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of said substrate which forms said cavity so that said sample solution is movable in said cavity; and discharging said sample solution onto a base plate from said discharge port of each of said micropipettes to produce said DNA chip, wherein:

said dispenser is provided with a pitch-varying mechanism for varying an arrangement pitch of said respective micropipettes;

said solution is supplied to said dispenser while allowing said arrangement pitch of said respective micropipettes of said dispenser to conform to an arrangement pitch of respective pipettes of a solution supply means for supplying said solution to said dispenser; and

said sample solution is supplied from said dispenser onto said base plate while setting said arrangement pitch of said respective micropipettes of said dispenser to be a pitch which is different from said arrangement pitch of said respective pipettes of said solution supply means.

23. The method for producing said DNA chip according to claim 22, wherein said sample solution is supplied onto said base plate in accordance with an ink-jet system.

24. A method for producing a DNA chip, comprising the steps of using a dispenser comprising a plurality of arranged micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging said sample solution therein, and a discharge port for discharging said sample solution, formed on at least one or more substrates, said micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of said substrate which forms said cavity so that said sample solution is movable in said cavity; and discharging said sample solution onto a base plate from said discharge port of each of said

micropipettes to produce said DNA chip, wherein:

5 said dispenser is provided with a holding section for holding a pipette for pouring said solution from said pouring port or a tube for receiving said pipette at a circumferential edge of said pouring port of each of said micropipettes; and

 said solution is supplied to said dispenser while holding said pipette or said tube with said holding section.

10 25. The method for producing said DNA chip according to claim 24, wherein a scale for measuring an amount of liquid poured into said tube is formed at least at a part of said tube for receiving said pipette.

15 26. The method for producing said DNA chip according to claim 24, wherein a portion provided with a projection and a portion provided with no projection are formed at positions of an identical distance from said pouring port on
20 a part of an inner wall of said tube for receiving said pipette.

25 27. The method for producing said DNA chip according to claim 24, wherein a filter, which is formed with a large number of openings having an opening area of not more than an opening area of said discharge port, is attached between said pouring port and said tube for receiving said pipette.

28. The method for producing said DNA chip according to claim 24, wherein said sample solution is supplied onto said base plate in accordance with an ink-jet system.

5

29. A method for producing a DNA chip, comprising the steps of using a dispenser comprising a plurality of arranged micropipettes each including a pouring port for pouring a sample solution from the outside, a cavity for pouring and charging said sample solution thereinto, and a discharge port for discharging said sample solution, formed on at least one or more substrates, said micropipette further including a piezoelectric/electrostrictive element disposed on at least one wall surface of said substrate which forms said cavity so that said sample solution is movable in said cavity; and discharging said sample solution onto a base plate from said discharge port of each of said micropipettes to produce said DNA chip, wherein:

a solution supply means, which is arranged with a large number of pipettes for supplying said solution to said dispenser and which has a pitch-varying mechanism for varying an arrangement pitch of said respective pipettes, is used;

said solution is supplied to said solution supply means while allowing said arrangement pitch of said respective pipettes to conform to an arrangement pitch of solution storage sections of a cartridge arranged with a large number

of said solution storage sections; and

said solution is supplied from said solution supply means to said dispenser while allowing said arrangement pitch of said respective pipettes to conform to an arrangement pitch of said respective micropipettes of said dispenser.

30. The method for producing said DNA chip according to claim 29, wherein said sample solution is supplied onto said base plate in accordance with an ink-jet system.

ABSTRACT OF THE DISCLOSURE

A dispenser comprises a plurality of arranged micropipettes each including a sample-pouring port for pouring a sample solution from the outside, a cavity for pouring and charging the sample solution thereinto, and a sample discharge port for discharging the sample solution, formed on at least one or more substrates, the micropipette further including an actuator section disposed on at least one wall surface of the substrate which forms the cavity so that the sample solution is movable in the cavity, and the sample solution being discharged from the sample discharge port of each of the micropipettes; wherein a pin, which protrudes upwardly, is provided at the sample-pouring port of each of the micropipettes.

FIG. 1




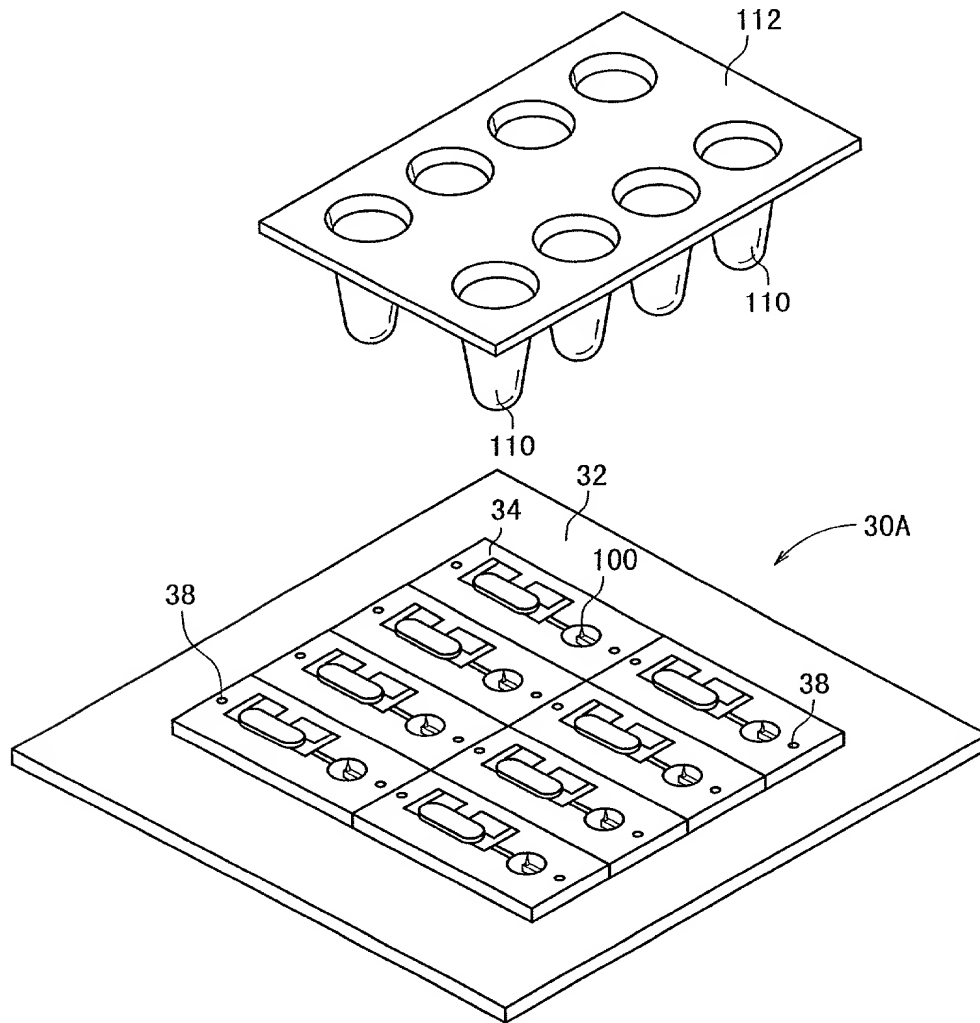


FIG. 2

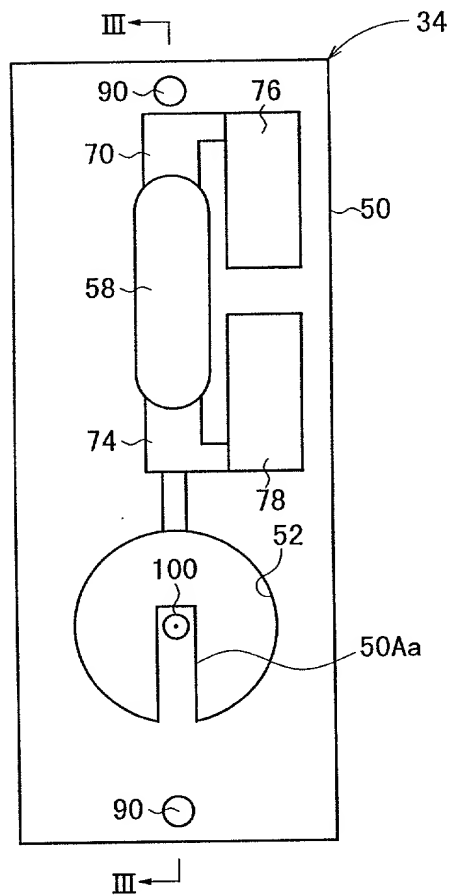


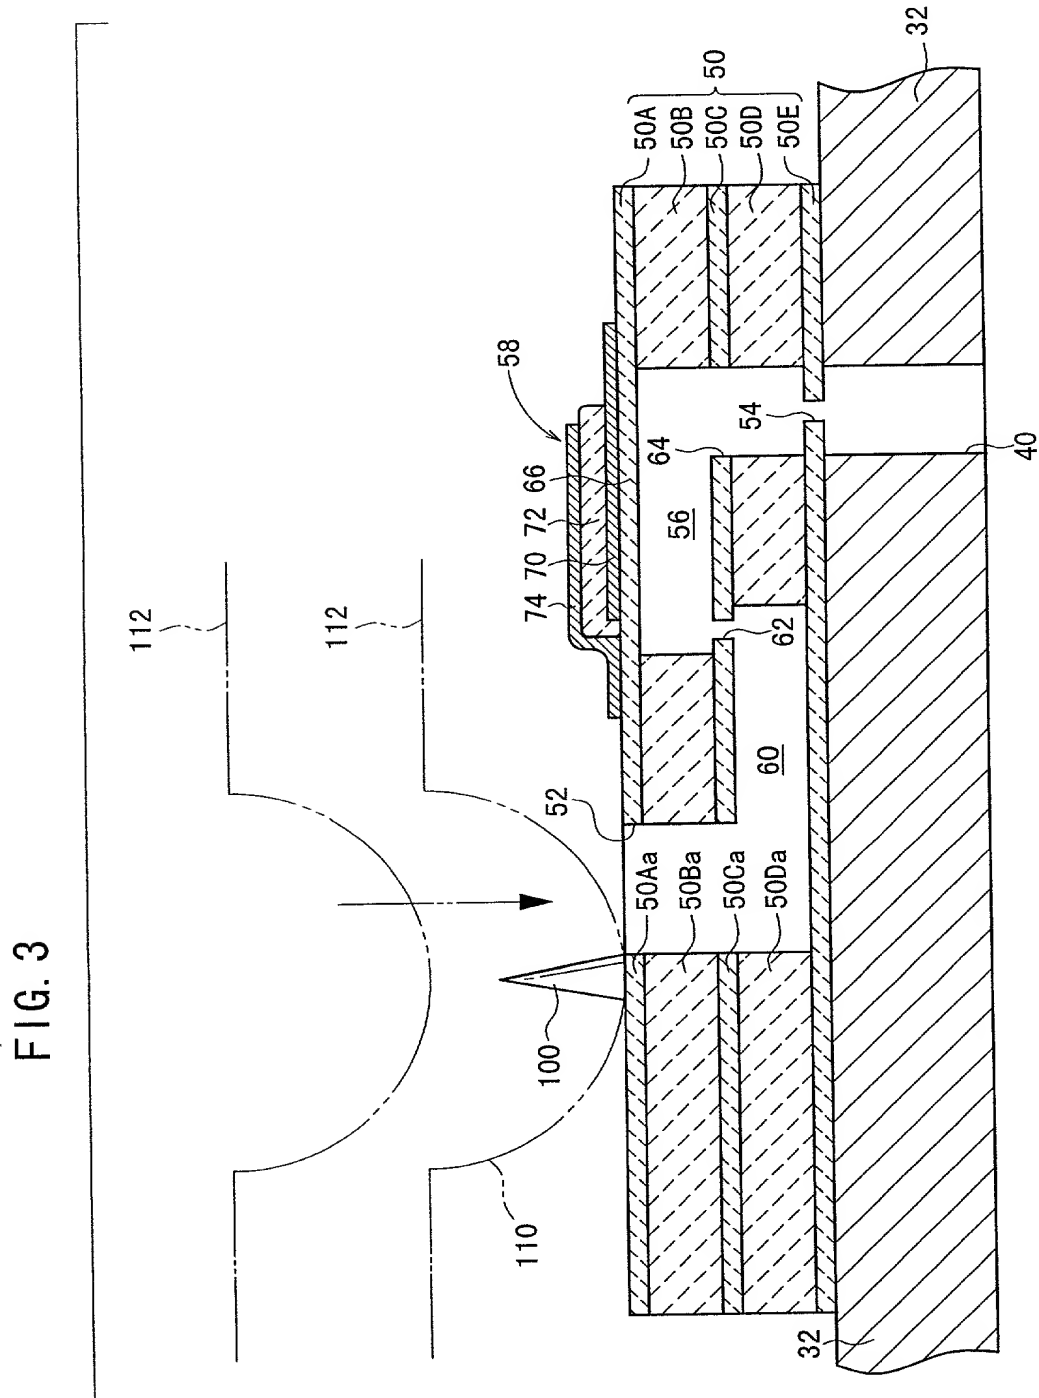

4/22

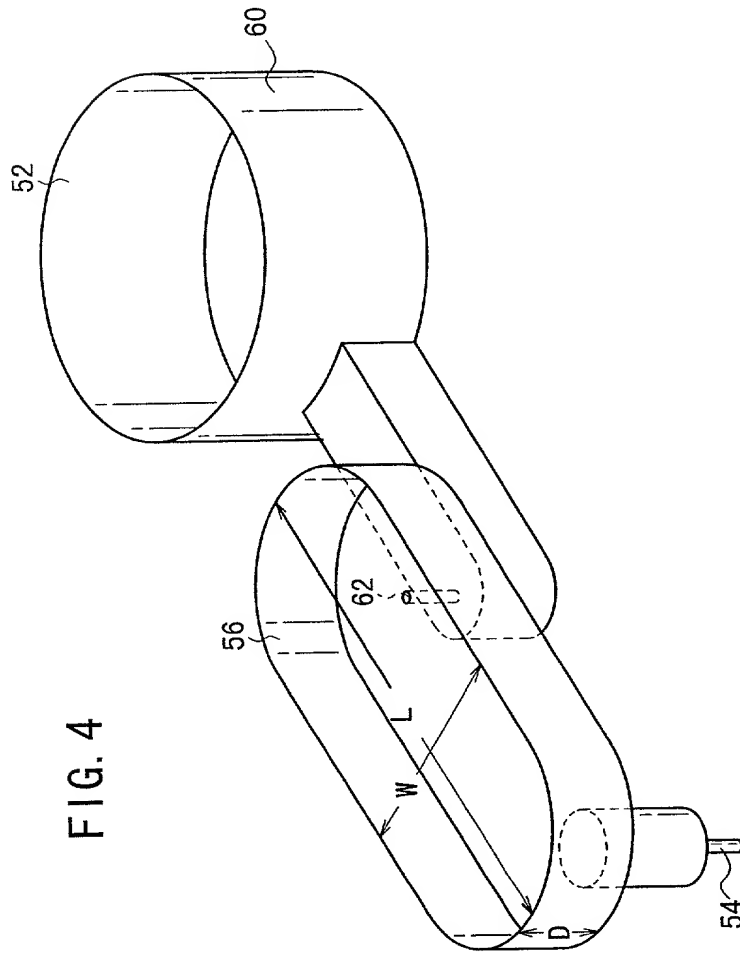


5/22

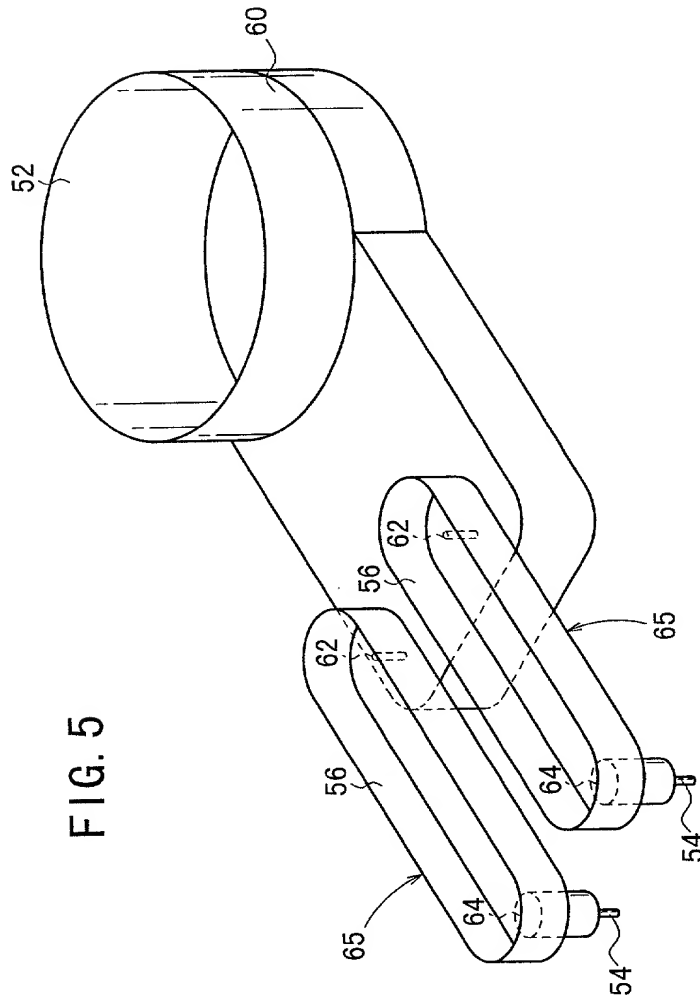


6/22


FIG. 6

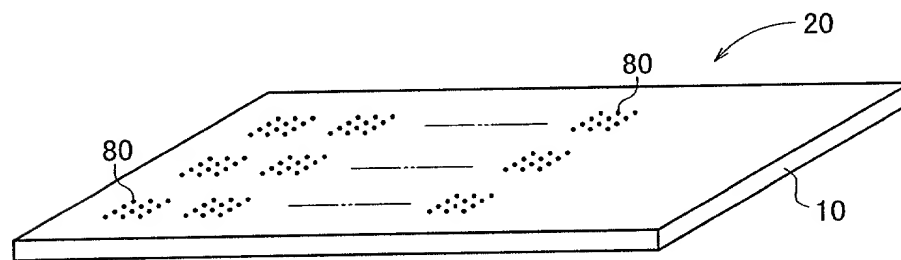


7/22

FIG. 7

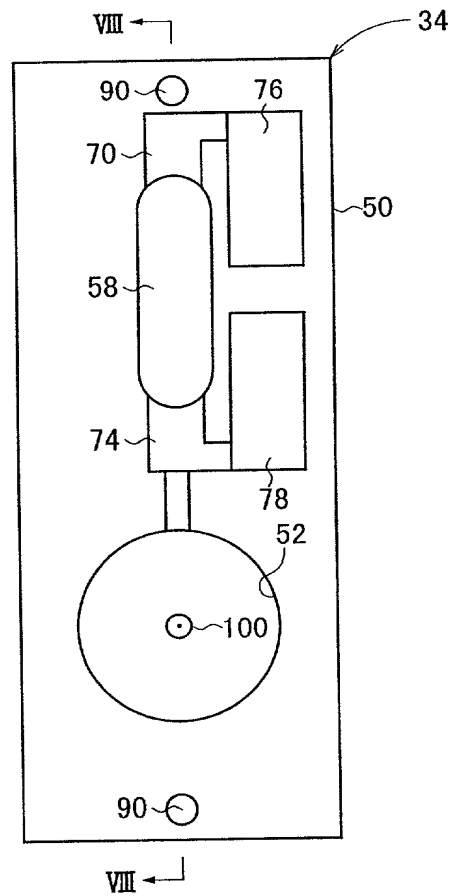


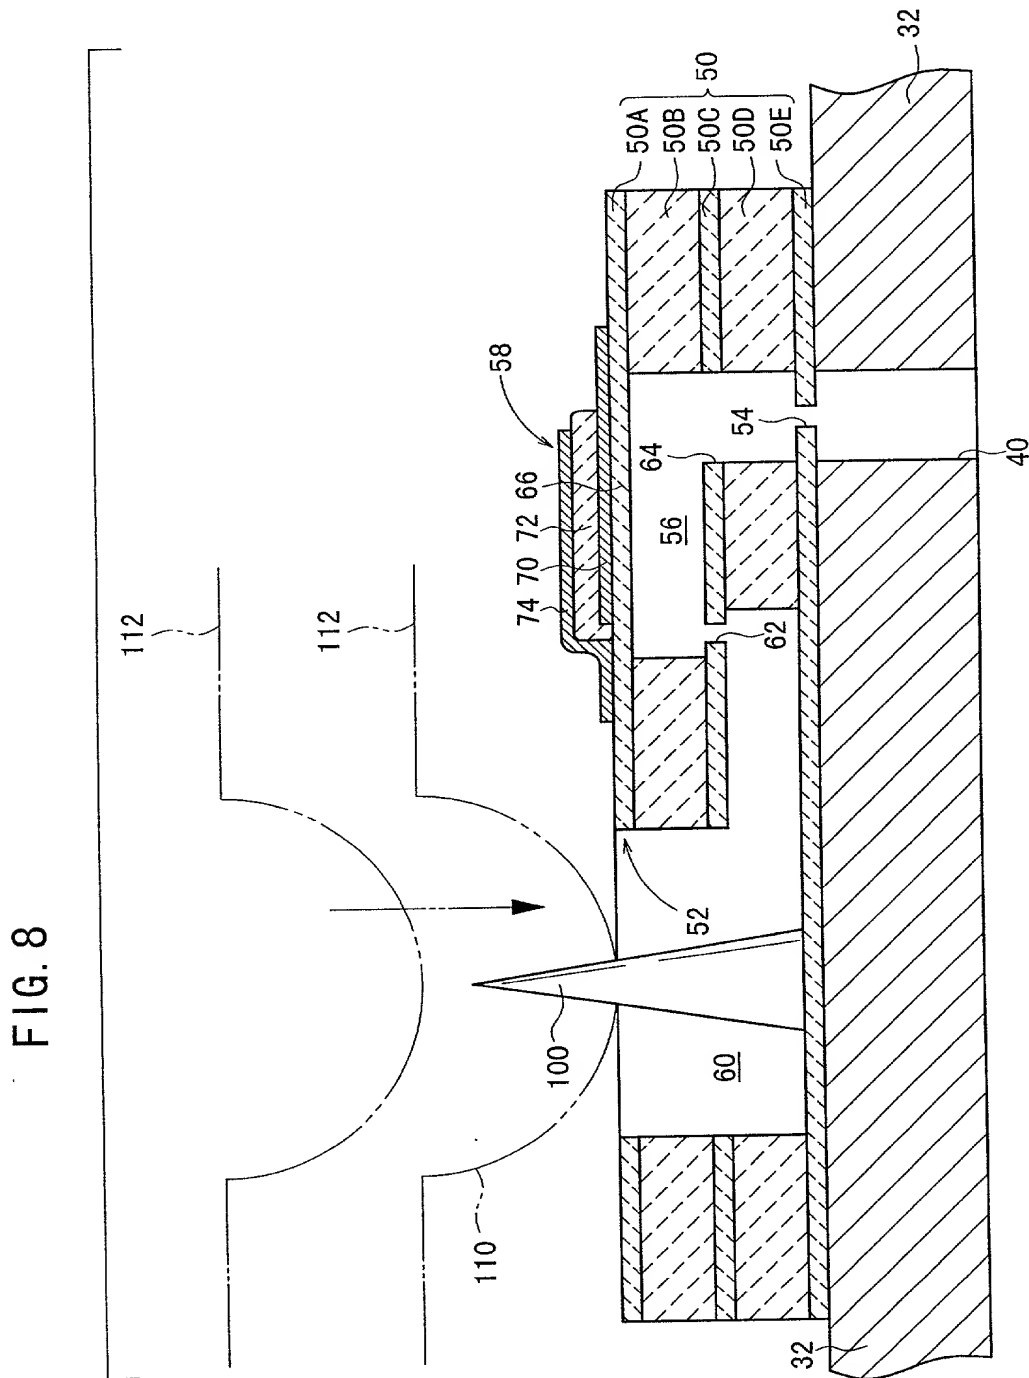



10/22


FIG. 10

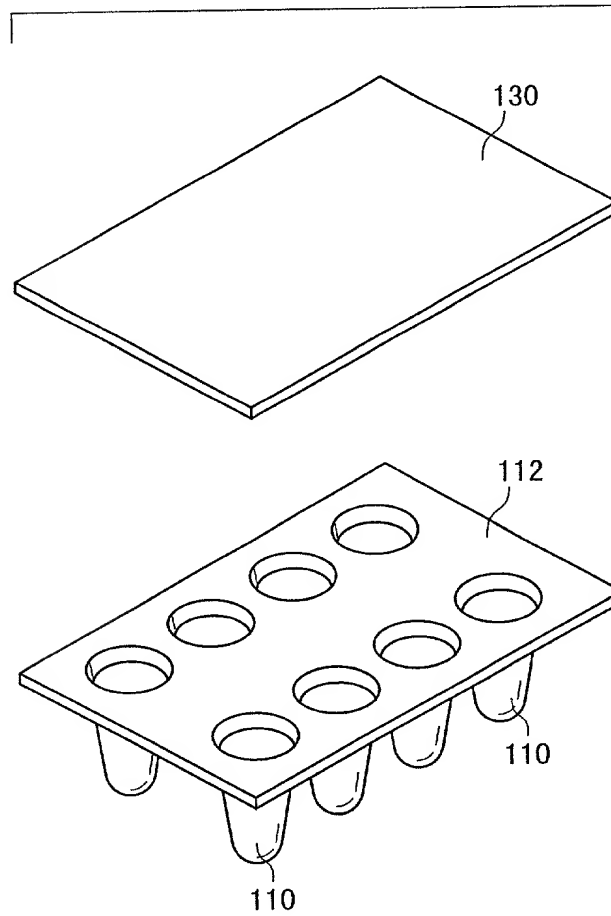

Approved for Release

11/22

FIG. 11

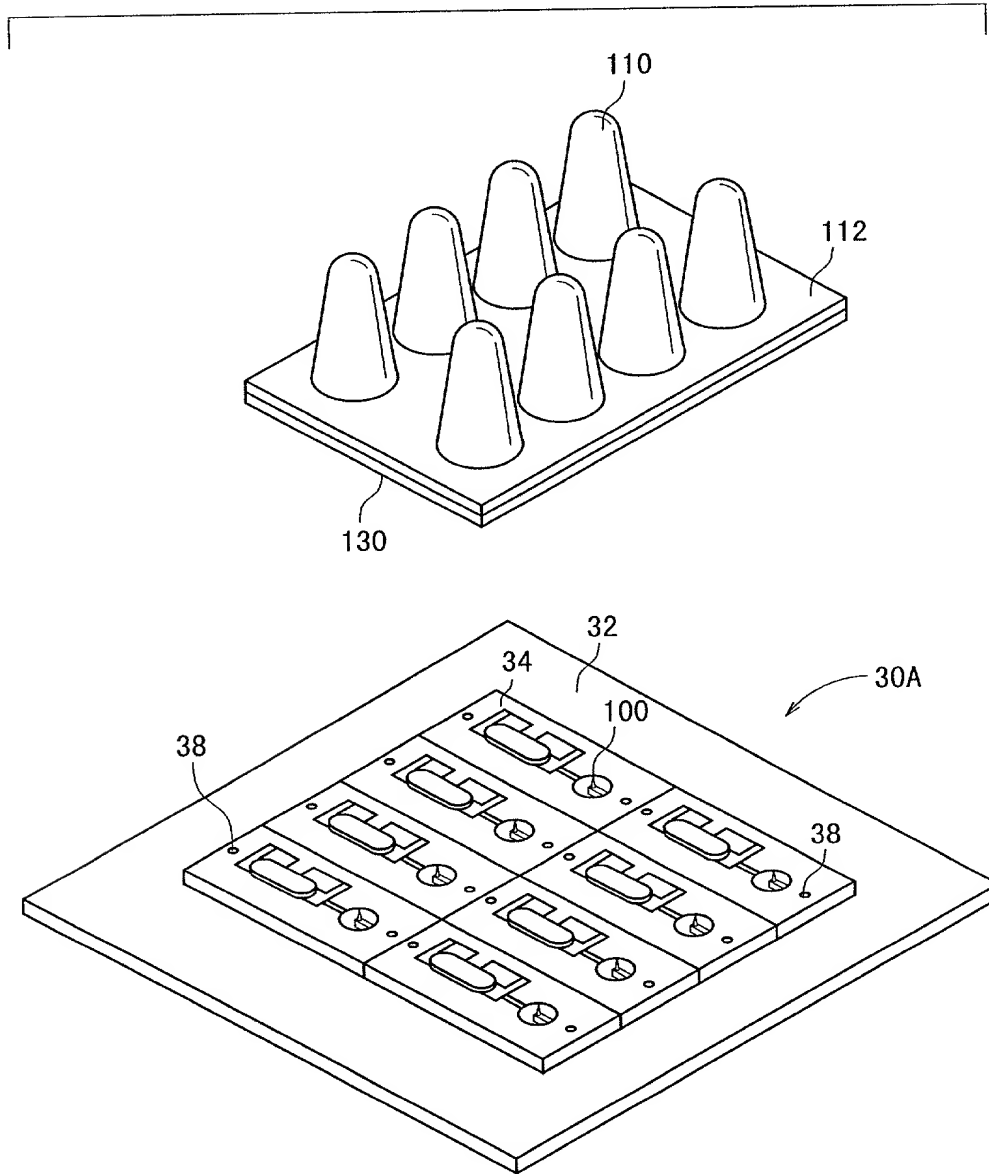

12/22

FIG. 12

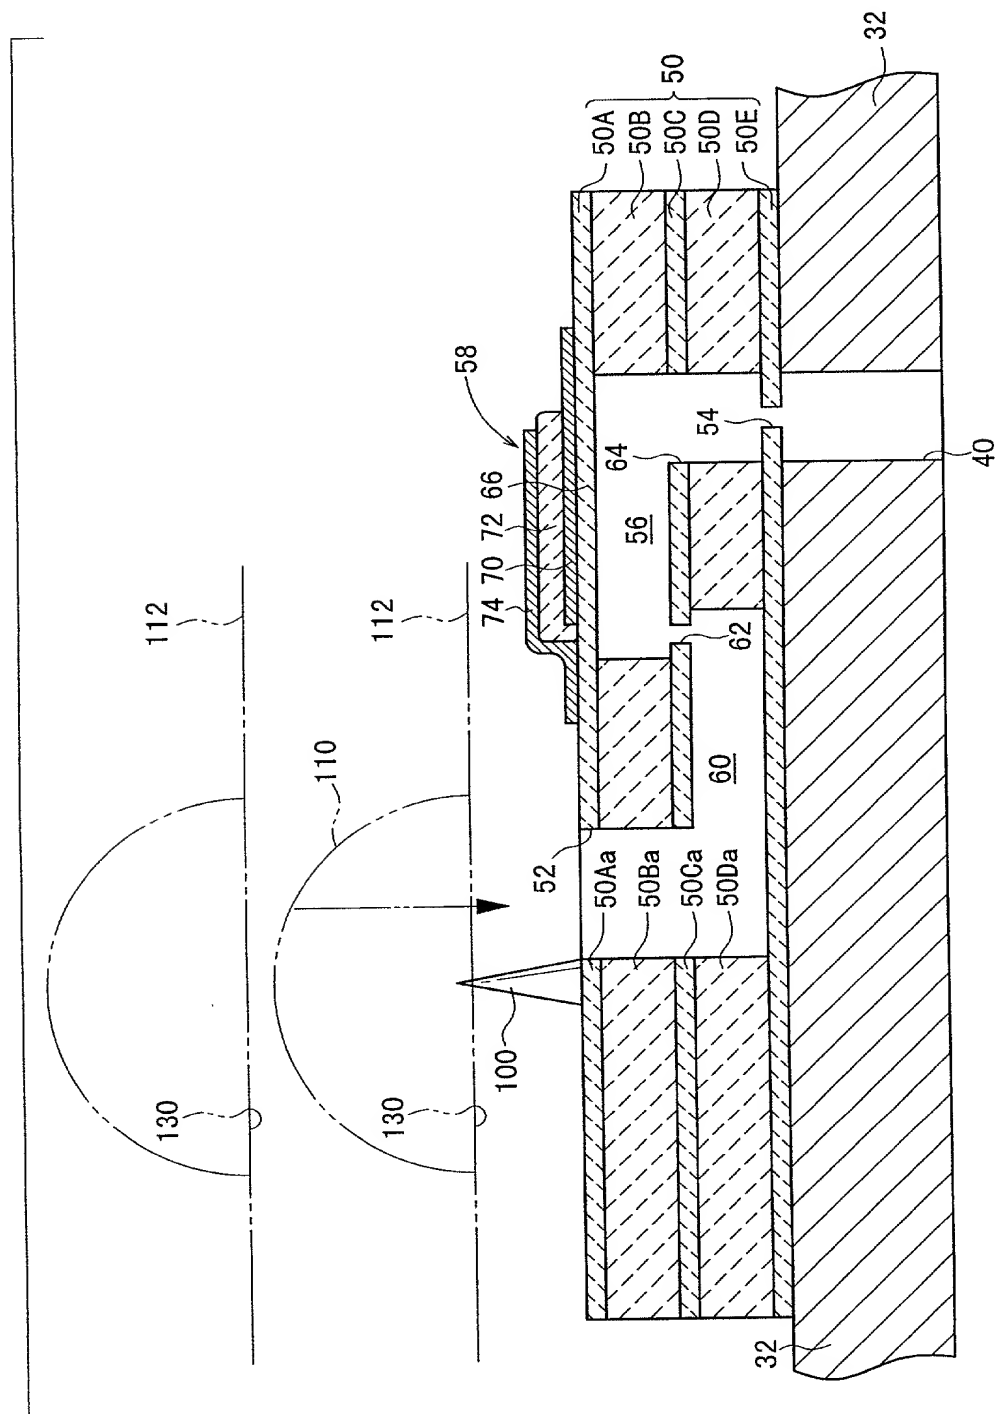


FIG. 13A


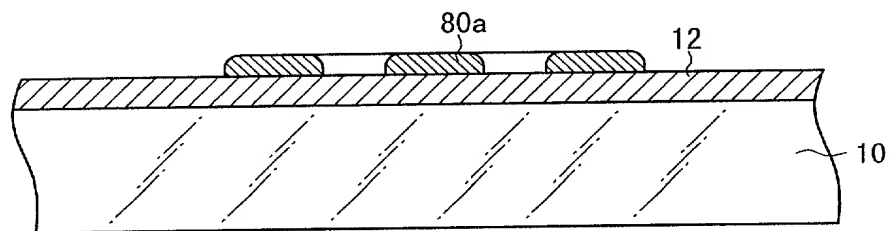


FIG. 13B

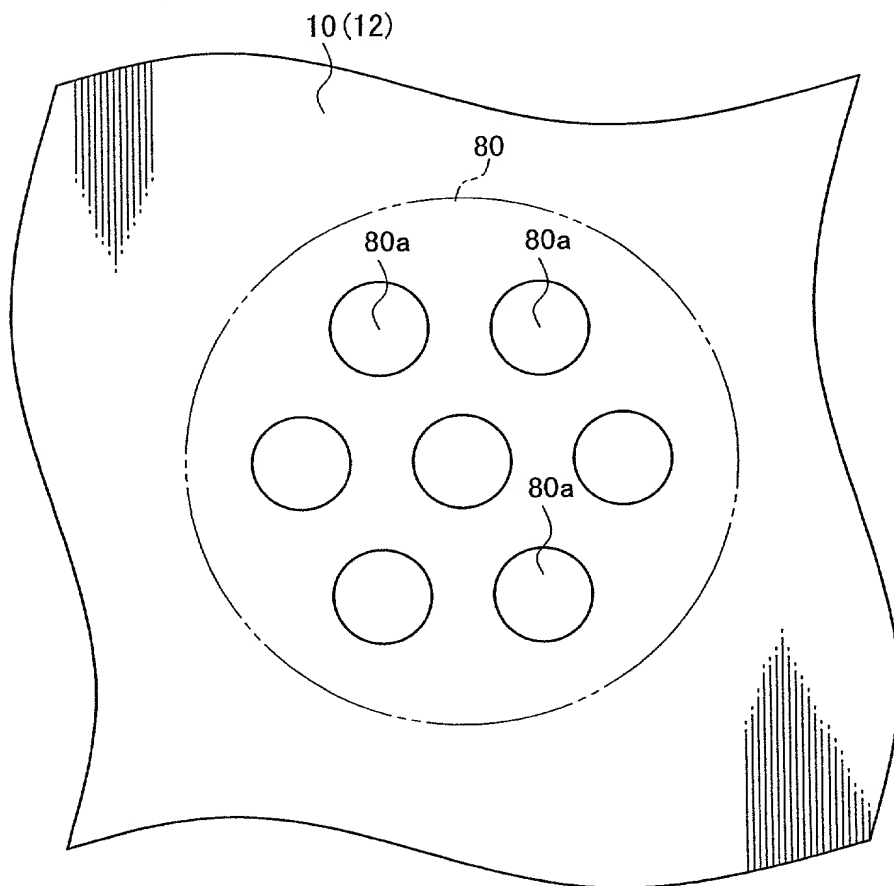

14/22

FIG. 14A



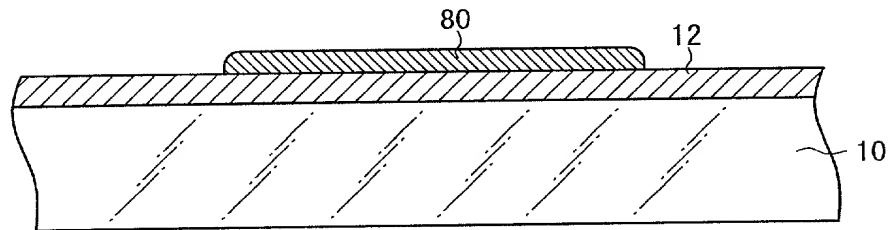


FIG. 14B

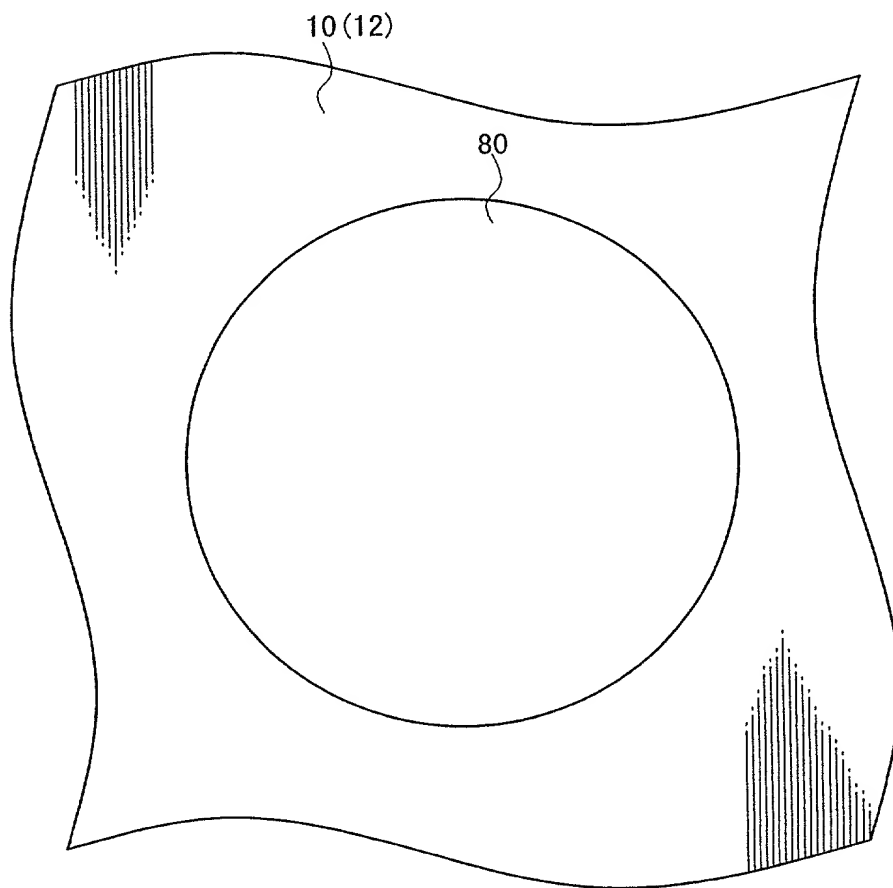

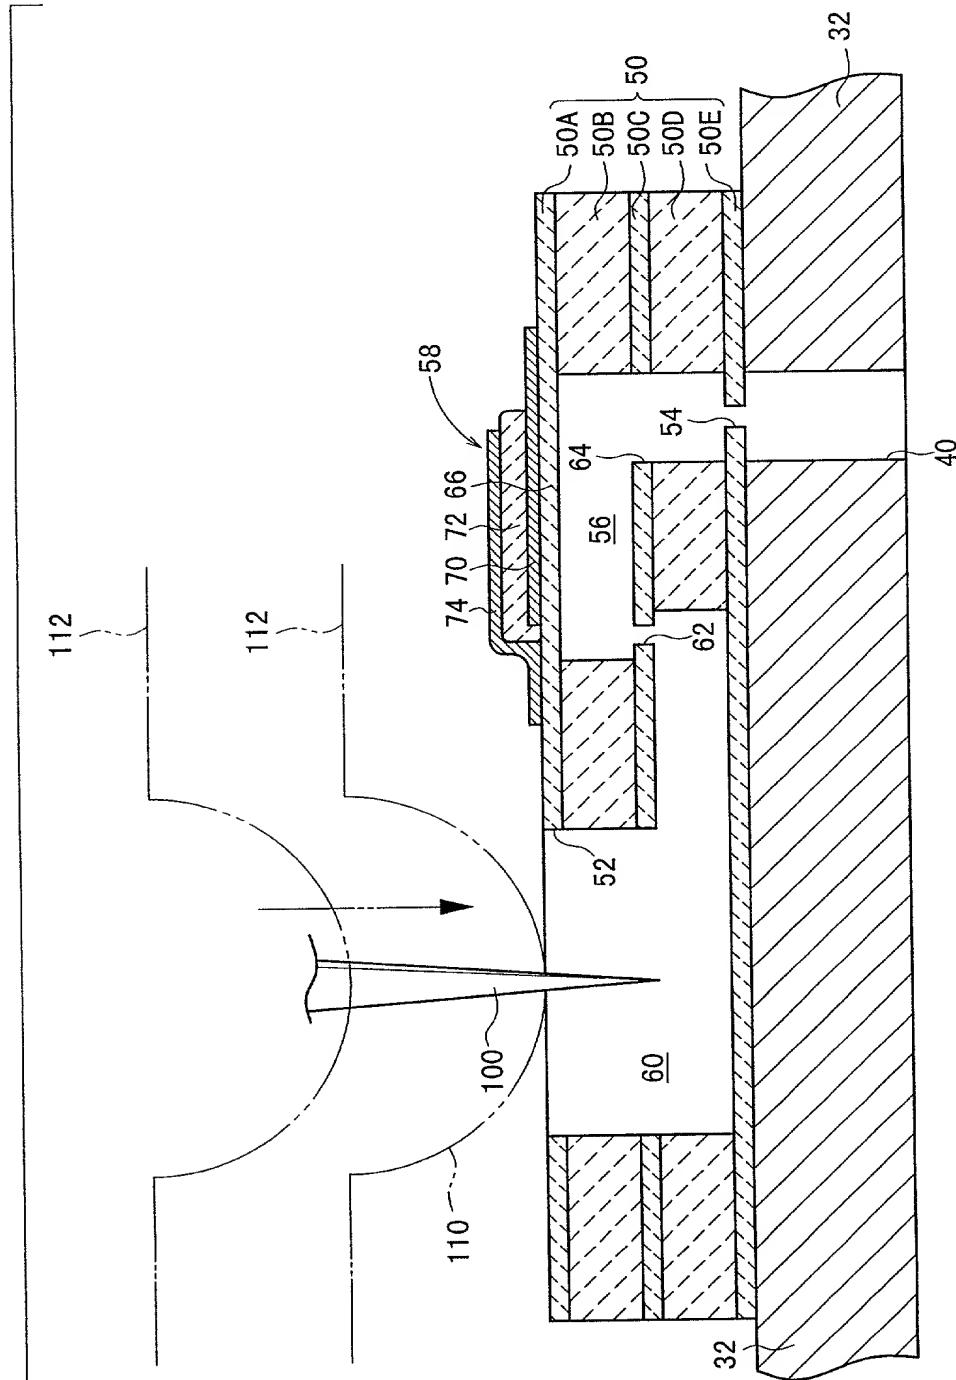

16/22

FIG. 16A


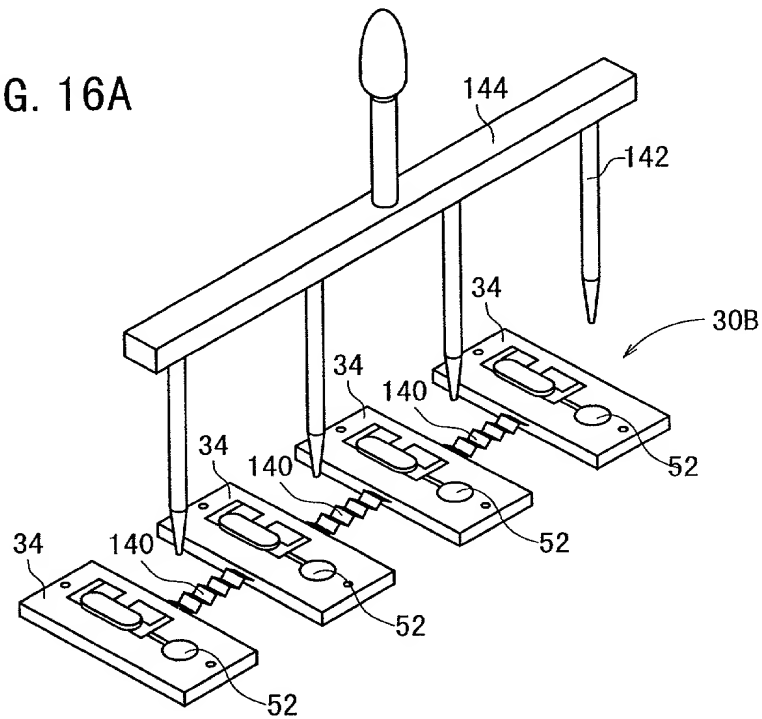


FIG. 16B

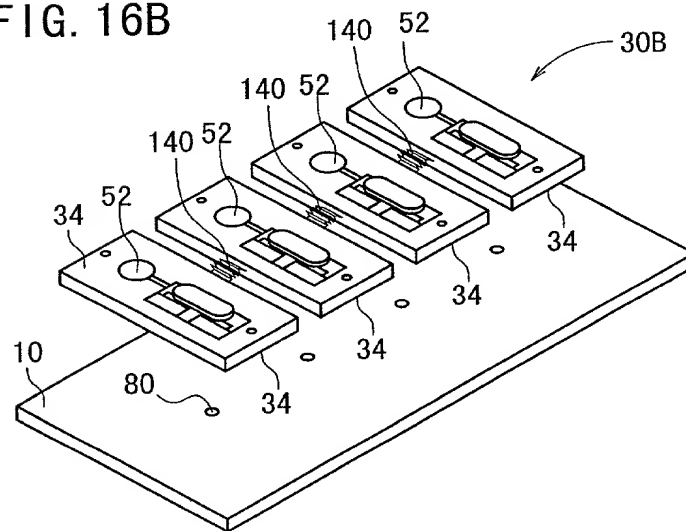

17/22

FIG. 17A

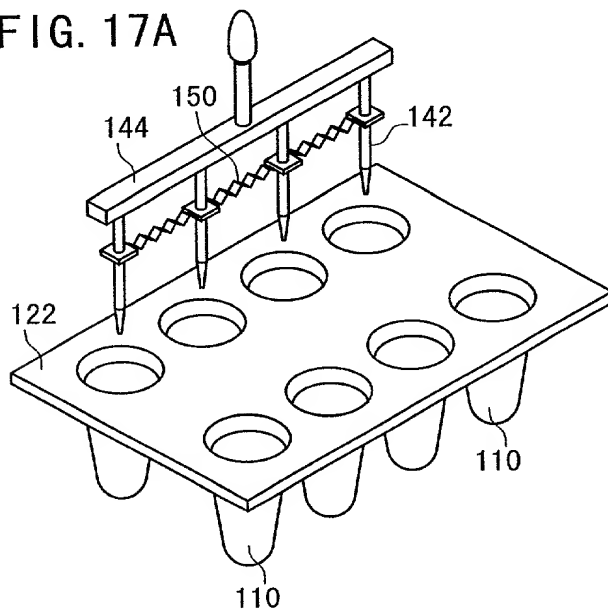


FIG. 17B



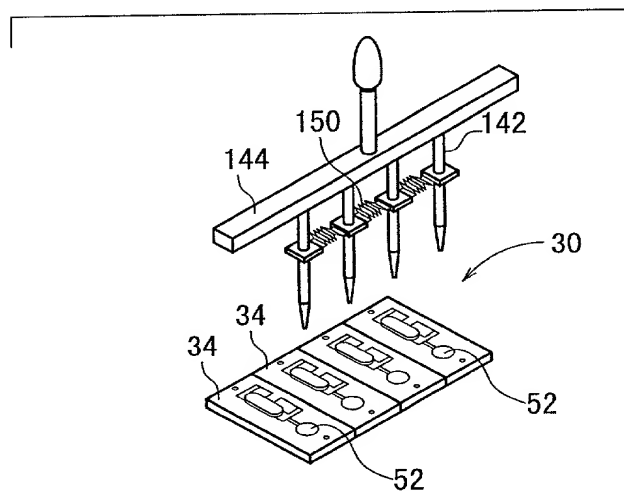


FIG. 17C

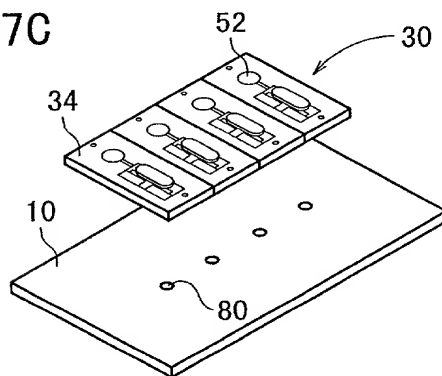

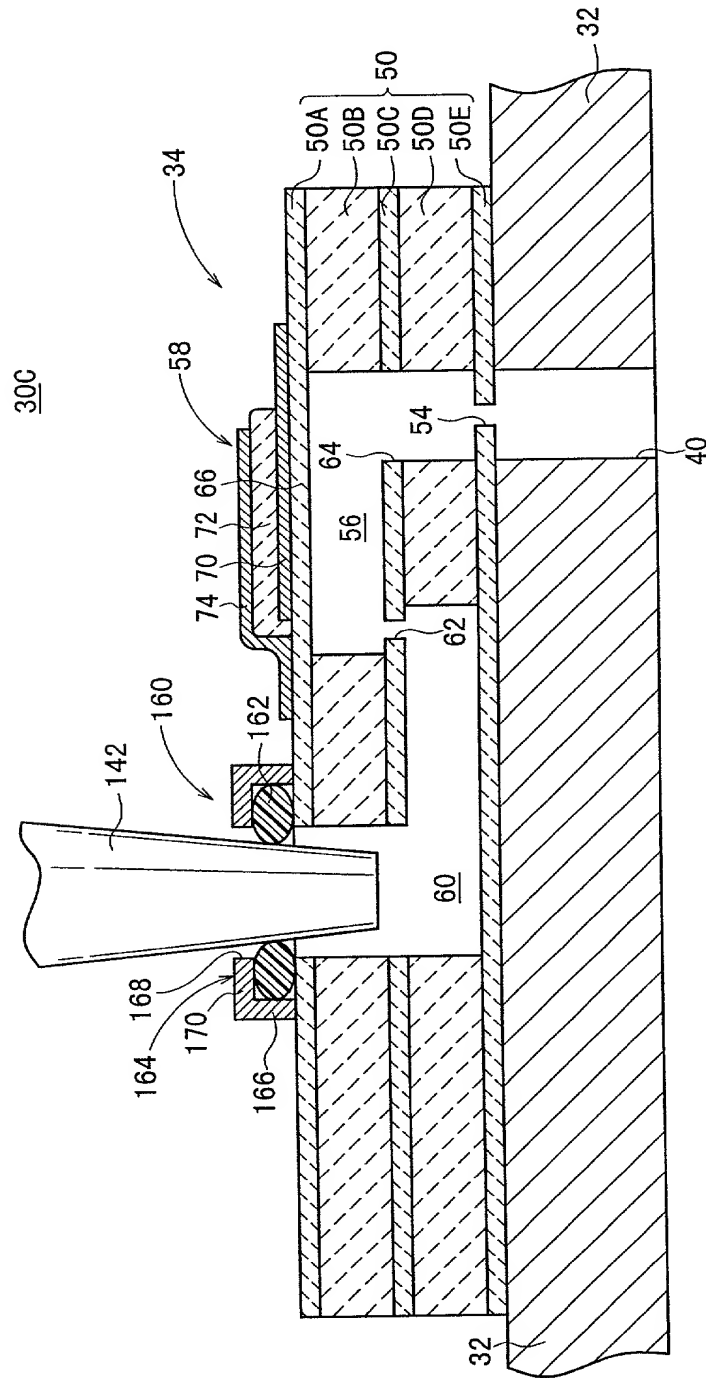

19/22

FIG. 19



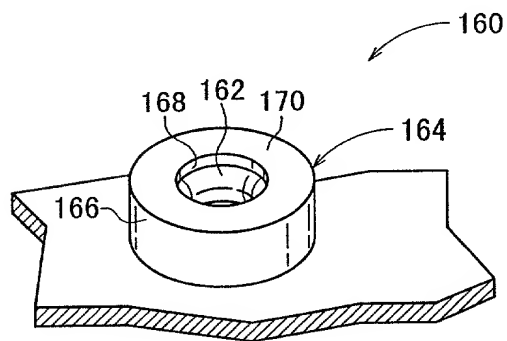


FIG. 20

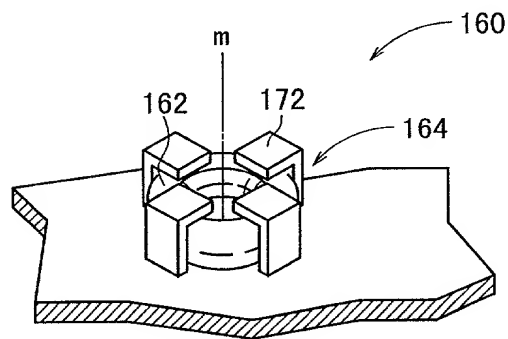

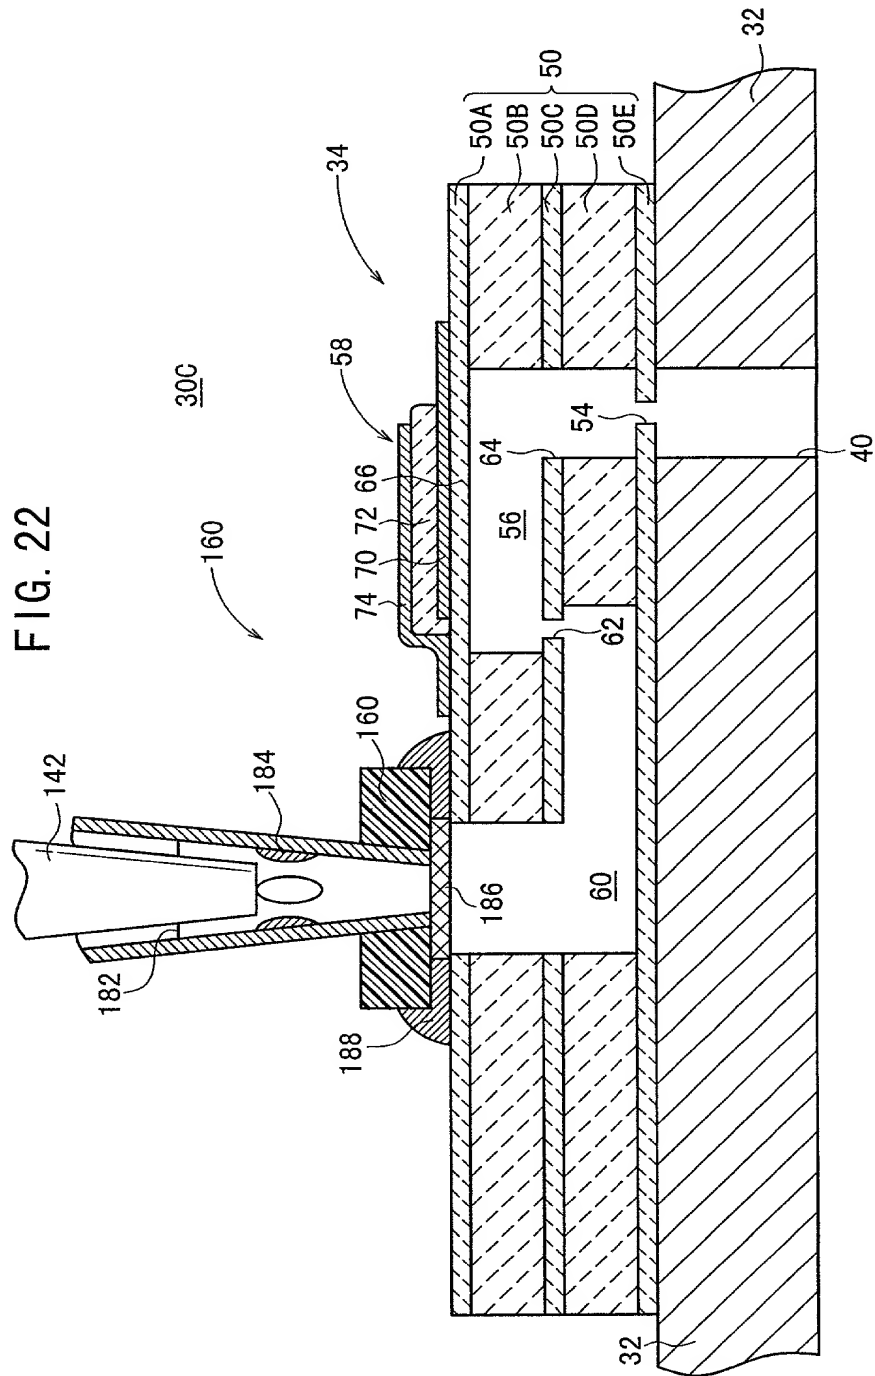

Declaration and Power of Attorney for Patent Application English Language Declaration	Attorney Docket No.	789 060
	First Named Inventor	Toshikazu HIROTA
	COMPLETE IF KNOWN	
	Application Number	
	Filing Date	
<input type="checkbox"/> Declaration Submitted with Initial Filing <input type="checkbox"/> Declaration Submitted After Initial Filing (surcharge (37 CFR 1.16(e) required)	Group Art Unit	

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DISPENSER AND METHOD FOR PRODUCING DNA CHIP

the specification of which (check one)

- ☒ is attached hereto.
- ☐ was filed on _____ as United States Application No. _____.
- ☐ was described and claimed in PCT International Application Number _____ filed on _____ and as amended under PCT Article 19 on _____ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International Application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International Application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

Patent Application No. 11-301627	Japan	22 October 1999	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
Patent Application No. 2000-083020	Japan	23 March 2000	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States Provisional Application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U.S.C. Section 120 of any United States Application(s), or Section 365(c) of any PCT International Application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International Application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C.F.R. Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.
(List names and Registration Number)

Stephen P. Burr, Reg. No. 32,970
Kevin C. Brown, Reg. No. 32,402
Charu Narang Moody, Reg. No. 44,963

Send Correspondence to:

Stephen P. Burr
Burr & Brown
P.O. Box 7068
Syracuse, NY 13261-7068

Customer No.: 25191

Direct Telephone Calls to: (name and telephone number)

Stephen P. Burr, (315) 233-8300

Full name of sole or first inventor

Toshikazu HIROTA

Sole or first inventor's signature

Toshikazu Hirota

Date

September 19, 2000

Residence

OWARIASASHI-CITY, AICHI-PREF., JAPAN

Citizenship

Japan

Post Office Address

c/o NGK INSULATORS, LTD., 2-56, SUDA-CHO, MIZUHO-KU, NAGOYA-CITY,
AICHI-PREF. 467-8530, JAPAN

Full name of second inventor, if any

Takao OHNISHI

Second inventor's signature

Takao Ohnishi

Date

September 19, 2000

Residence

NISHIKASUGAI-GUN, AICHI-PREF., JAPAN

Citizenship

Japan

Post Office Address

c/o NGK INSULATORS, LTD., 2-56, SUDA-CHO, MIZUHO-KU, NAGOYA-CITY,
AICHI-PREF. 467-8530, JAPAN

Full name of third inventor, if any

Yukihisa TAKEUCHI

Third inventor's signature

Yukihisa Takeuchi

Date

September 19, 2000

Residence

NISHIKAMO-GUN, AICHI-PREF., JAPAN

Citizenship

Japan

Post Office Address

c/o NGK INSULATORS, LTD., 2-56, SUDA-CHO, MIZUHO-KU, NAGOYA-CITY,
AICHI-PREF. 467-8530, JAPAN

Full name of fourth inventor, if any

Fourth inventor's signature

Date

Residence

Citizenship

Post Office Address

Full name of fifth inventor, if any

Fifth inventor's signature

Date

Residence

Citizenship

Post Office Address

Full name of sixth inventor, if any

Sixth inventor's signature

Date

Residence

Citizenship

Post Office Address